
# **1220**

### **CARSON**<sup>®</sup> Spec Grade

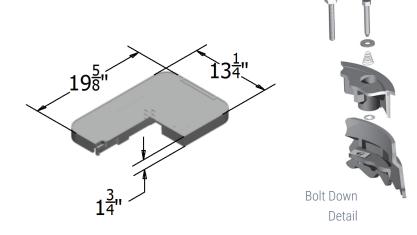

#### COVER

Style:	Flush	
Material:	HDPE	
Model:	12" x 20"	
Weight:	5 lbs	
Std. Fasteners:	3/8" Hex Bolt	
Options:	Logos and Special Markings	
Surface:	Skid Resistant & Marked	
Performance:	Pedestrian, ASTM C857, WUC 3.6	

Cover comes standard with permanent markings for manufacturer and model size.

#### BODY

Material:	HDPE	
Model:	12" x 20"	
Weight:	6" Depth: 6 lbs	
	12" Depth: 7 lbs	
Wall Type:	Flared	
Mouseholes:	2 or 3	
Performance:	Pedestrian, ASTM C857, WUC 3.6	

#### **EXTENSION**


Material:	HDPE
Weight:	6 lbs


#### LOAD RATING / NOTES



LIGHT DUTY PEDESTRIAN / GREENBELT

For use in non-vehicular traffic situations only. Weights and dimensions may vary slightly. Actual load rating is determined by the box and cover combination.

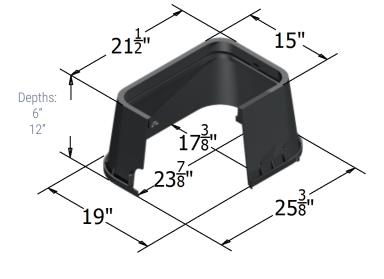

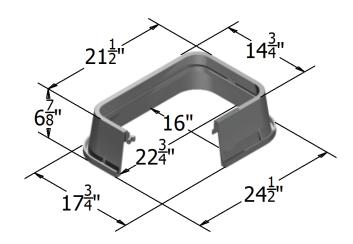

## **1220** CARSON<sup>®</sup> Spec Grade

#### **COVER OPTIONS**


**COLOR OPTIONS** 

HDPE, T-Cover Solid HDPE, Flush Solid HDPE, Flush with Plastic Reader Door HDPE, Flush with Cast Iron Reader Door HDPE, Flush Hinged with Adapter Ring

Cover: Black, Green, Gray, Tan, Purple, Blue

Body: Black, Green, Gray, Tan, Purple, Blue

Extension: Black, Green, Tan, Purple, Blue



T-Cover Solid



Hinged Cover (requires factory installed ring)



Flush Solid



#### Reader Door Detail







Drop-N-Lock (T-Cover only)

#### FASTENER OPTIONS

Hex Head Bolt (A) Penta Head Bolt (B) Penta Head Coil Thread Bolt (B) Oldcastle Vandal Resistant Bolt (C) Captive Bolt Retainer Drop-N-Lock<sup>™</sup> L Bolt

**ADD ON OPTIONS** 

AMR Friendly Solutions Touch Read Hole Metal Locating Plate

**EMS Marker** 



Coil Thread

KJ.S

Bolt Retainer (for standard thread)



L Bolt Detail



WARNING: Cancer - www.P65Warnings.ca.gov

All information contained on this sheet is current at the time of publication. Oldcastle reserves the right to discontinue or update product information without notice. Revision 11/30/18 © 2018 Oldcastle Infrastructure



oldcastleinfrastructure.com (800) 735-5566