


COVER

Style:	Flush Solid
Material:	Polymer Concrete
Model:	24" x 36"
Weight:	Tier 15: 150 lbs Tier 22: 204 lbs
Std. Fasteners:	1/2-13 Stainless Steel Hex Head Bolt, Washer and Floating Nut
Options:	Logos and Special Markings
Surface:	Slip Resistant & Marked*
Coefficient of Friction:	>0.6 ASTM 1028
Performance:	ANSI/SCTE-77, Tier 15 or Tier 22*, ASTM C857 A-12

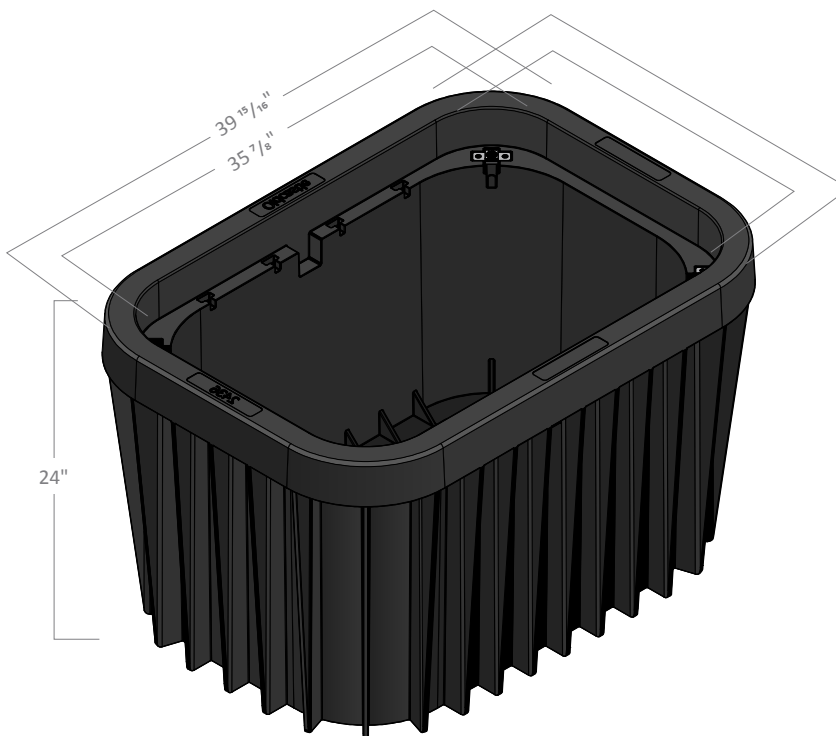

BODY

Material:	Polyolefin Blend
Model:	24" x 36"
Depth:	24"
Weight:	70 lbs
Wall Type:	Straight
Performance:	ANSI/SCTE-77, Tier 15 or Tier 22*, ASTM C857 A-12



Medium Duty:
Incidental,
Non-deliberate Traffic



Heavy Duty: Incidental,
Non-deliberate Traffic

For use in non-vehicular traffic situations only.

Actual load rating is determined by the box and cover combination.

Weights and dimensions may vary slightly.

Based upon lid and body combination, this unit can be Tier 15 or Tier 22.

* T22 rating when paired with T22 polymer concrete lid.

Cover comes standard with permanent markings for manufacturer, load rating, model size and manufacturing location.

Revision 11/2017

©2017 Oldcastle, Inc.

OPTIONS

AVAILABLE POLYOLEFIN BLEND COVER:

T Cover

LOCKING OPTIONS FOR ALL COVERS:

Hex Head Bolt Down


Penta Head Bolt Down

Vandal Resistant Bolt Down

Hex Head Coil Thread Bolt

ADD ON OPTIONS:

EMS Marker

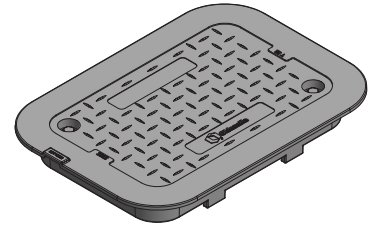

Polyolefin Blend
T Cover

Coil Thread
Bolt



Standard
Bolt



Hex Head



Penta Head



Vandal
Resistant



EMS
Marker

PRODUCT LOAD RATING



Medium Duty: Incidental, Non-deliberate traffic

For use in non-vehicular traffic situations only. Actual load rating is determined by the box and cover combination.



Heavy Duty: Incidental, Non-deliberate traffic

For use in non-vehicular traffic situations only. Actual load rating is determined by the box and cover combination.

NOTES

Actual load rating is determined by the box and cover combination.
Weights and dimensions may vary slightly