

### COVER

Style:	Flush
Material:	Polymer Concrete
Model:	39" Dia.
Std. Fasteners:	3/8-16 Stainless Steel Hex Head Bolt, Washer and Floating Nut
Options:	Logos and Special Markings
Surface:	Slip Resistant
Performance:	ANSI/SCTE-77 Tier 15

### BODY

Material:	Fiber Reinforced Polymer w/ Polymer Concrete Ring
Model:	39" Dia.
Depths:	24", 36", 48", 72"
Wall Type:	Flared
Performance:	ANSI/SCTE-77 Tier 15



Medium Duty:  
Incidental,  
Non-deliberate Traffic

For use in non-vehicular traffic situations only.

Actual load rating is determined by the box and cover combination.

Weights and dimensions may vary slightly.

**OPTIONS**

**AVAILABLE POLYMER COVER:**

Flush




**FASTENER OPTIONS FOR POLYMER COVERS:**

Penta Head Bolt  
Oldcastle Enclosures Vandal Resistant Bolt  
Penta Coil Thread Bolt  
Captive Bolt Retainer

**ADD ON OPTIONS:**

EMS Marker (E)  
Mouseholes/Knockouts  
Rack Mount (A)  
Cable Racks/Cable Arms (B)  
Unistrut (C)  
Pulling Eye - 1,000 lb and 3,000 lb (D)  
Ground Buss (F)  
Dividers  
Racking Provision  
Lid Gaskets\*

\*Lid Gaskets inhibit water flow into the box, they do not make enclosure fully waterproof.

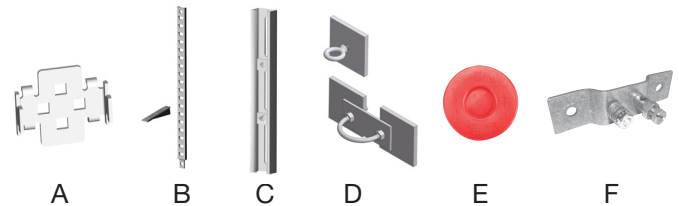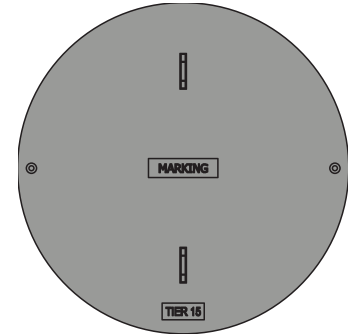

**PRODUCT  
LOAD RATING**



**Medium Duty: Incidental, Non-deliberate traffic**  
For use in non-vehicular traffic situations only. Actual load rating is determined by the box and cover combination.

**NOTES**

Actual load rating is determined by the box and cover combination.  
Weights and dimensions may vary slightly