

COVER

Style: Material: Model: Std. Fasteners: Flush (3 Piece) Polymer Concrete 48" x 96"


ners: 1/2-13 Stainless Steel Hex Head Bolt, Washer and

Floating Nut

Options: Surface: Performance: Logos and Special Markings

Slip Resistant

ANSI/SCTE-77 Tier 15

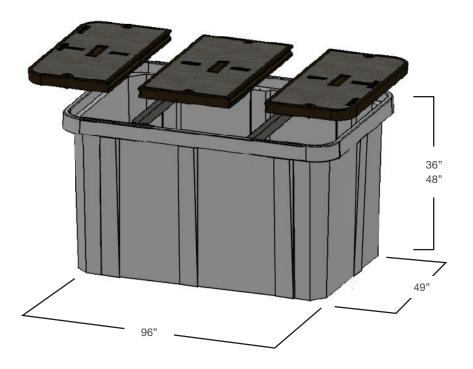

BODY


Material:

Model:
Depths:
Wall Type:
Performance:

Fiber Reinforced Polymer w/ Polymer Concrete Ring 48" x 96"

36", 48" Straight

ANSI/SCTE-77 Tier 15



For use in non-vehicular traffic situations only.

Actual load rating is determined by the box and cover combination.

Weights and dimensions may vary slightly.

Revision 2/2018 ©2018 Oldcastle, Inc.





OPTIONS

AVAILABLE POLYMER COVER:

Flush

FASTENER OPTIONS FOR POLYMER COVERS:

Penta Head Bolt

Oldcastle Enclosures Vandal Resistant Bolt

Penta Coil Thread Bolt

Captive Bolt Retainer

ADD ON OPTIONS:

EMS Marker (E)

Mouseholes/Knockouts

Rack Mount (A)

Cable Racks/Cable Arms (B)

Unistrut (C)

Pulling Eye - 1,000 lb and 3,000 lb (D)


Ground Buss (F)

Dividers

Racking Provision

Lid Gaskets*

*Lid Gaskets inhibit water flow into the box, they do not make enclosure fully waterproof.

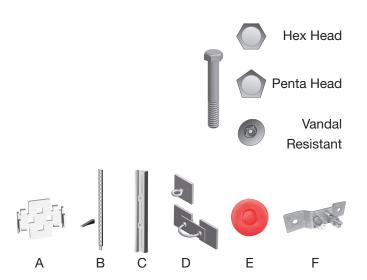





Medium Duty: Incidental, Non-deliberate traffic

For use in non-vehicular traffic situations only. Actual load rating is determined by the box and cover combination.

NOTES

Actual load rating is determined by the box and cover combination. Weights and dimensions may vary slightly

All information contained on this sheet is current at the time of publication. Oldcastle reserves the right to discontinue or update product information without notice.

©2018 Oldcastle, Inc.