

1050 TRENCH

TRENCH TOP No. 1050-TT-12

18,800 lbs.

8-Ton Lift Anchor
(4 Places in Top)

1'-0"

OPTIONAL
Galvanized "C" Channel
for Pipe Hangers
as Required

6'-9"

TRENCH BASE No. 1050-5-TB

25,100 lbs.

10'-2"

4'-11³/₈"

5'-9"

8-Ton Lift Anchor
(4 Places in Floor)

10'-0"

11'-7¹/₂"

Note:

- Customer is responsible for supplying crane
to set and assemble trench sections.

OPTIONAL TRENCH BASES No. 1050-7-TB

29,600 lbs.

7'-0"

10'-2"

10'-0"

11'-7¹/₂"

8-Ton Lift Anchor
(4 Places in Floor)

No. 1050-10-TB

40,100 lbs.

10'-2"

10'-0"

10'-0"

11'-7¹/₂"

8-Ton Lift Anchor
(4 Places in Floor)

Note: Designed for 0 to 5'-0" of Cover



PO Box 323, Wilsonville, Oregon 97070-0323
Tel: (503) 682-2844 Fax: (503) 682-2657

1050 TRENCH


File Name: 020-1050TR

Issue Date: 2016


oldcastleprecast.com/wilsonville

1050 TRENCH
10 x 5, 10 x 7, 10 x 10


1050 TRENCH

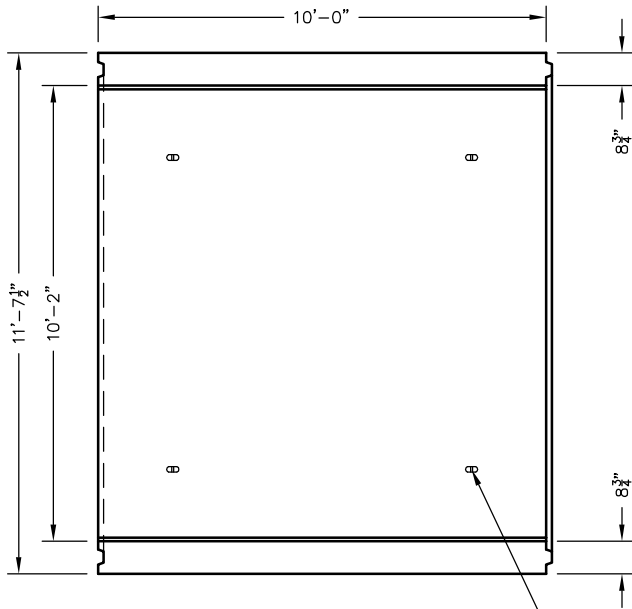

(4) - 8-Ton Lift Anchors
PLAN VIEW - BASE

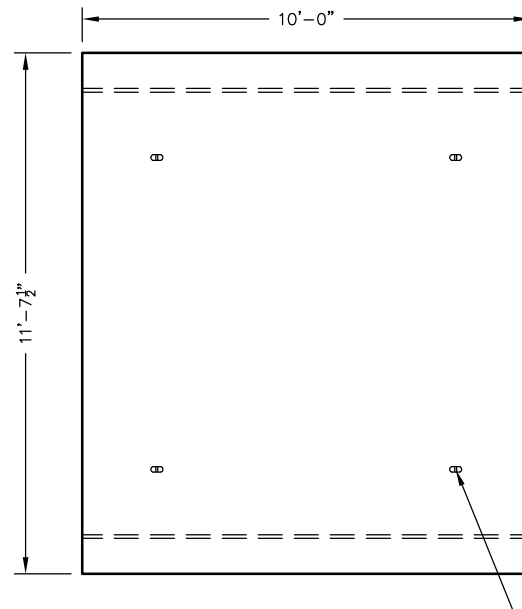


(4) - 8-Ton Lift Anchors
PLAN VIEW - TOP

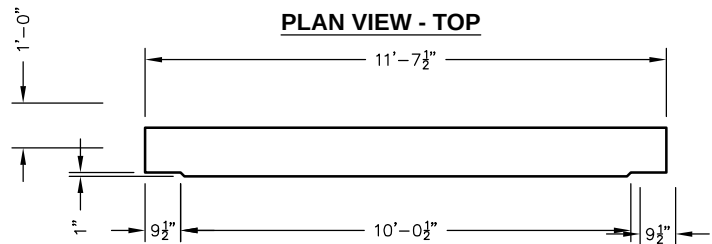

END VIEW - TOP



SIDE VIEW - BASE

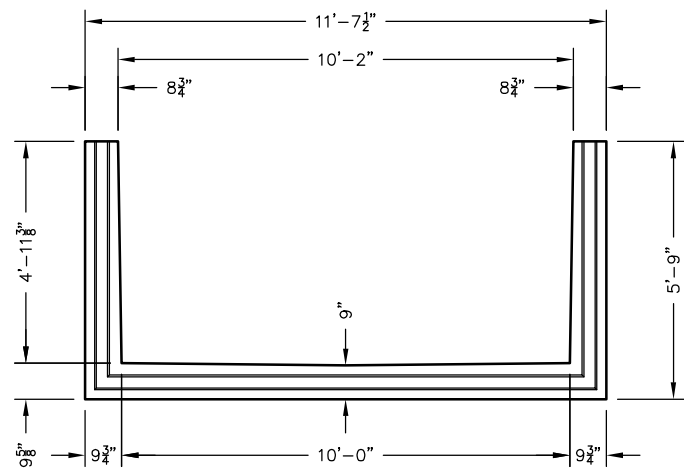

END VIEW - BASE

- Notes:
- Customer to grout or caulk joints on vertical plane.
 - Butyl resin sealant supplied for joints on horizontal plane.



PO Box 323, Wilsonville, Oregon 97070-0323
Tel: (503) 682-2844 Fax: (503) 682-2657

1050 TRENCH

File Name: 020-1050TR

Issue Date: 2016

oldcastleprecast.com/wilsonville

1050 TRENCH
10 x 5, 10 x 7, 10 x 10