


## REINFORCED CONCRETE PIPE - SINGLE OFFSET

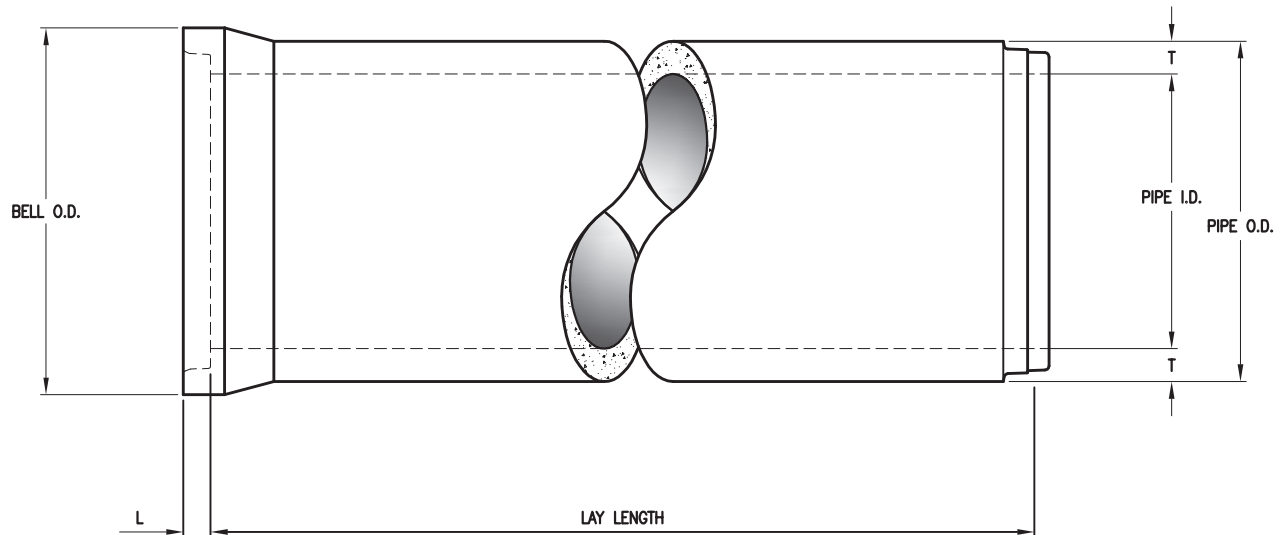

### DIMENSIONAL DATA

PIPE I.D. (in.)	PIPE O.D. (in.)	BELL O.D. (in.)	T WALL THICKNESS (in.)	LAY LENGTH (ft.)	L JOINT (in.)	APPROXIMATE WT/FT (lbs.)
27"	35.00"	39.625"	4.00"	8'-0"	3.88"	440lbs.
30"	38.50"	42.250"	4.25"	8'-0"	4.63"	524lbs.
36"	45.50"	51.125"	4.75"	8'-0"	4.88"	684lbs.
42"	51.00"	58.000"	4.50"	8'-0"	5.25"	745lbs.
48"	59.50"	64.114"	5.75"	8'-0"	4.75"	936lbs.
54"	65.00"	70.000"	5.50"	8'-0"	5.50"	1270lbs.
60"	73.50"	76.547"	6.75"	8'-0"	5.50"	1505lbs.
72"	88.00"	88.00"	8.00"	8'-0"	5.50"	2140lbs.
84"	101.5"	101.5"	8.75"	8'-0"	5.75"	2460lbs.
96"	Also Available					
108"						
120"						
132"						
144"						

#### NOTES:

1. MEETS ASTM C-76 FOR REINFORCED CONCRETE SEWER & STORM DRAIN PIPE.
2. ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES.