




Strength and Durability Carefully Crafted.

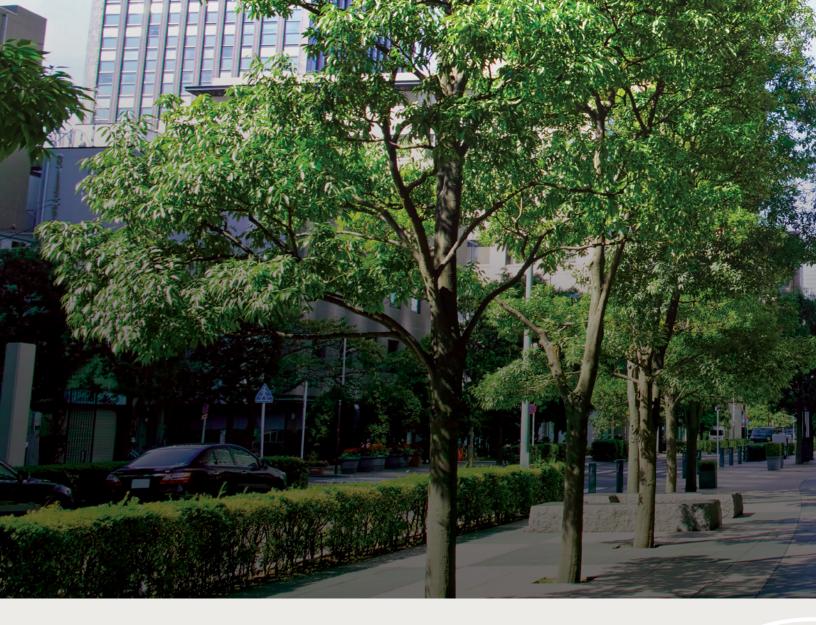

Crafted with **your needs in mind.**

Our unique hybrid process bonds strong, polymer concrete rings with highimpact resistant fiberglass sidewalls, forming a monolithic body. When Oldcastle FRP bodies are paired with polymer concrete covers, select units are suitable for light or heavy incidental traffic. Specifiers can meet expected load ratings while installers can handle and modify with ease.

We utilize carefully crafted manufacturing methods to ensure we provide products with high-impact resistance and long-lasting durability.



Lightweight Design

The unique spray-up fiberglass manufacturing method paired with the polymer ring creates a strong, lightweight product.

Strong

Strength and durability are key features. The reinforced fiberglass sidewalls are high-impact resistant, providing a superior solution to a common challenges.



Easily Modifiable

Easily modified in the field with 18V power tools.

Robust Offering

Offering a broad range of sizes and depths to provide the right product for your project.

1	7	
	0	

	Model	Size (LxW)	Shape	Depths (Straight Wall)	Depths (Flared Wall)	
	1118	11" x 18"	Rectangle	12", 18"	12", 18"	
	1324	13" x 24"		18", 24"	12", 18", 24"	
	1419	14" x 19"		-	18", 24"	
	1730	17" x 30"		12", 18", 24"	12", 18", 24"	
	2424	24" x 24"	Square	24"	-	
	2436	24" x 36"	Rectangle	18", 24", 30", 36", 48	12", 18", 24", 30", 36"	
	3048	30" x 48"		18", 24", 30", 36"	30", 36"	
	3060	30" x 60"		30", 36"	-	
	3660	36" x 60"		24", 30", 36"	36"	
	4872	48" x 72"		36", 48"	-	
	4896 48" x 96"		36", 48"	-		
	1000	10" Dia	Round	_	18"	
	1800	18" Dia		-	36", 48"	
	2200	22" Dia		-	30"	
	2700	27" Dia		_	36", 48"	
	3900	39" Dia		_	24", 36", 48", 72"	
	4000	40" Dia		_	48"	
	5400	39" Dia		36", 46"	-	
Material	Fiberglass Reinforced Polymer with Polymer Concrete Ring					
Wall Type	Straight and Flared					
Performance	Tier 8 and Tier 15					
Rating	Light Duty and Medium Duty					

Dimensions may vary slightly.



www.oldcastleinfrastructure.com | (888) 965-3227

Trusted partnerships. Full scale solutions.