



# GENERAL DESIGN NOTES

1. CONCRETE: 28 DAY COMPRESSIVE STRENGTH  $f_c = 5,000$  psi.
2. REINFORCING: ASTM A-615, GRADE 60.
3. SLAB DESIGNED FOR 3,000 Lb. DEAD LOAD.
4. SLAB SHALL BE SUPPORTED BY A 3" (MIN) LAYER OF LEVEL COMPACTED CRUSHED STONE OR SAND BED.

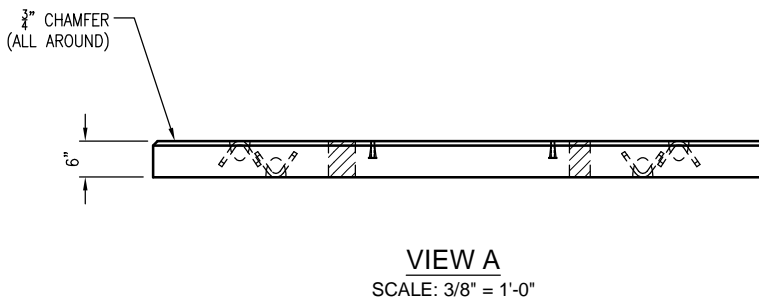

WEIGHT		
SECTION	WEIGHT (lbs)	Concrete (CY)
SLAB	5,450	1.35

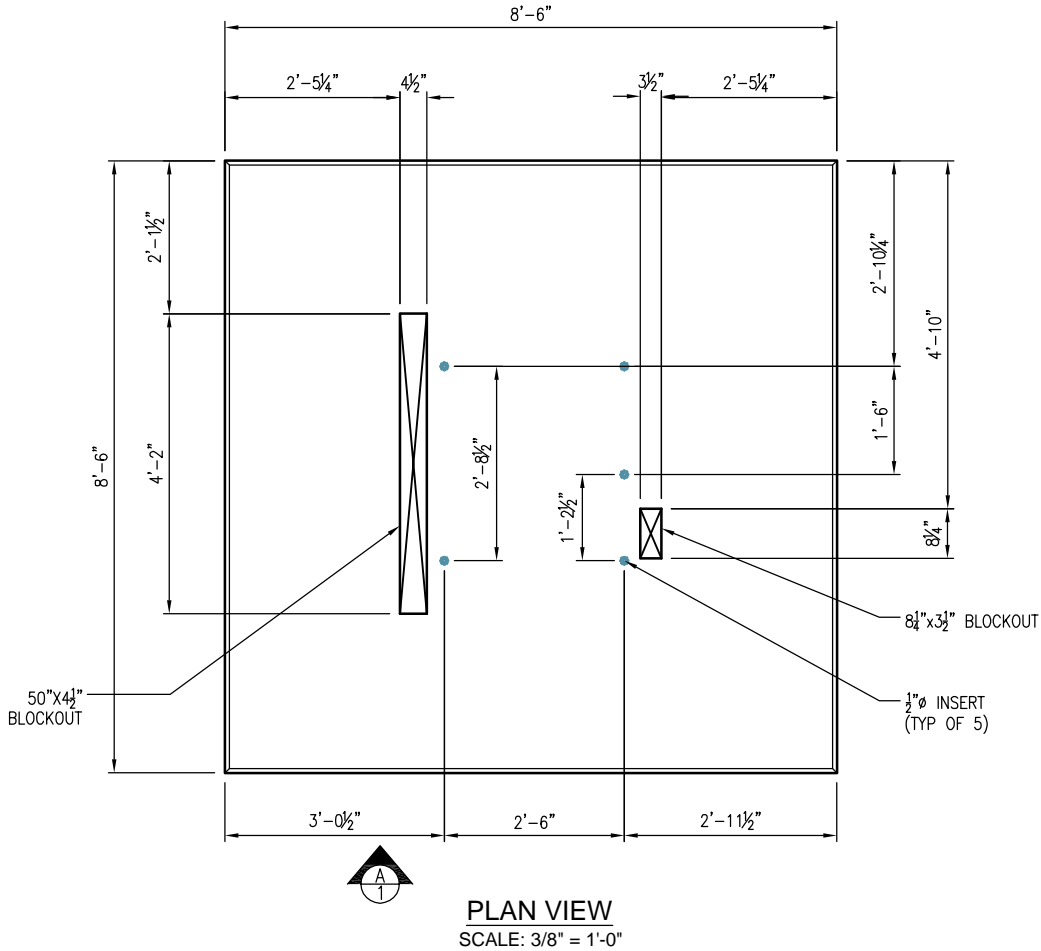

THIS DOCUMENT IS THE PROPERTY OF OLDCASTLE PRECAST, INC. IT IS CONFIDENTIAL, SUBMITTED FOR REFERENCE PURPOSES ONLY, AND SHALL NOT BE USED IN ANY WAY INJURIOUS TO THE INTERESTS OF, OR WITHOUT THE WRITTEN PERMISSION OF OLDCASTLE PRECAST, INC. COPYRIGHT © 2013 OLDCASTLE PRECAST, INC ALL RIGHTS RESERVED

**52EU STANDARD PAD**  
SUBMITTAL LAYOUT

8'6" X 8'6" X 6"

CUSTOMER  
**A T & T (PIN #ATT.100052139)**

DATE	SALES	DRAWN	ENGINEER	CHECKED	SALES ORDER
7/31/14	—	EP	—	—	—
DRAWING NUMBER				REVISION	SHEET
ATT-52EU				—	1 OF 1

## REVISIONS

REV	DATE	BY	SHEET	DESCRIPTION OF REVISION	REQUESTED BY