
File: 264UECG750GT

750 Gallon Grease Interceptor

Model: **750 GI**

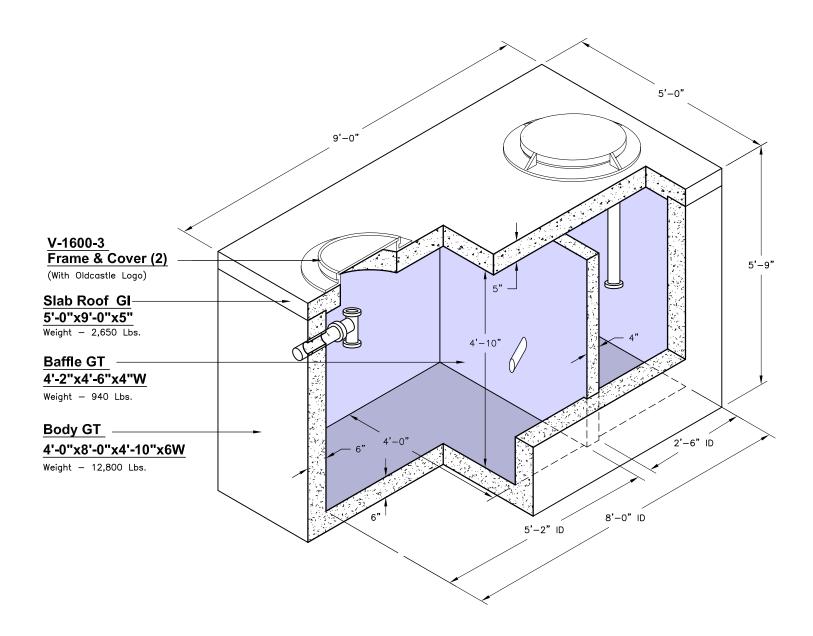

SPECIFICATIONS:

- 1. Concrete: Design Strength of 5500 PSI at 28 Days.
- 2. Steel Reinforcement: ASTM A-615 Grade 60.
- 3. Loading: Designed for HS-20 Loading.
- 4. C.I. Castings: ASTM A-48 Class 30/35.

GENERAL NOTES:

- 1. Interceptor is Structurally and Hydraulically Engineered Conforming to Uniform Plumbing Code.
- 2.Liquid Capacity is 765 Gallons with Solids Retention Capacity of Approx. 2,004 Pounds.
- 3.Recommended for Flow Rate up to 21 GAL Per Minute.