



GENERAL DESIGN NOTES:

1. CONCRETE: 28 DAY COMPRESSIVE STRENGTH $f_c = 5,000$ psi.
2. REINFORCING: ASTM A-615, GRADE 60.
3. RISER DESIGNED FOR 3,000 Lb. DEAD LOAD.
4. RISER SHALL BE SUPPORTED BY A 3" (MIN) LAYER OF LEVEL COMPACTED CRUSHED STONE OR SAND BED.

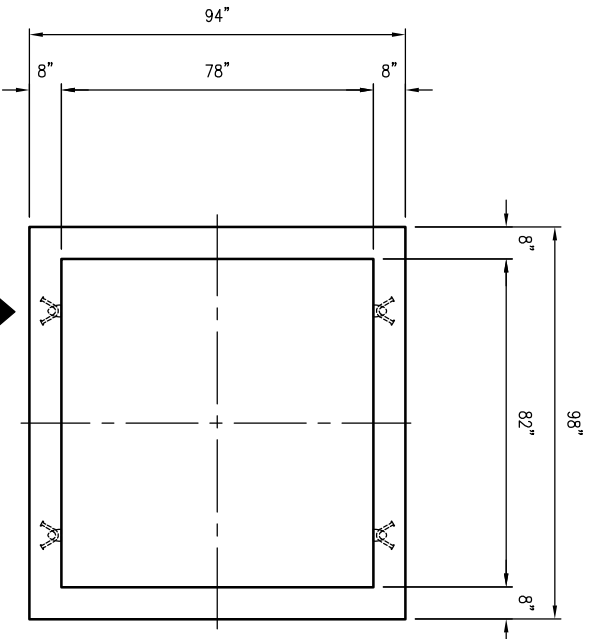

PLAN VIEW
SCALE: 1/4" = 1'-0"

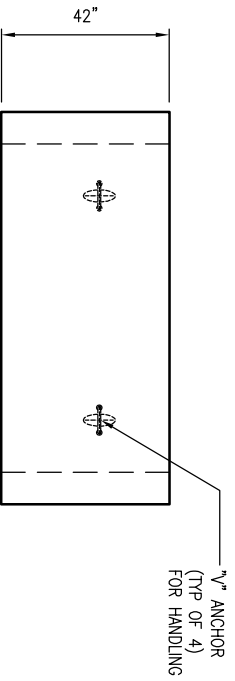

VIEW A
SCALE: 1/4" = 1'-0"

REVISIONS

REV	DATE	BY	SHEET	DESCRIPTION OF REVISION	REQUESTED BY
A					
B					

THIS MUST BE FILLED OUT BEFORE MANUFACTURING BEGINS.

APPROVED W/ NO EXCEPTIONS TAKEN:

APPROVED AS NOTED:

REVISED AND RESUBMIT:



Oldcastle Precast
 4065 STOUGH RD, CONCORD, NC
 OFFICE: 704-798-4900 FAX: 704-798-4900
 NC ENGINEERING LICENSE #E-11092

THIS DOCUMENT IS THE PROPERTY OF OLDCASTLE PRECAST, INC. IT IS CONFIDENTIAL, SUBMITTED FOR REFERENCE PURPOSES ONLY, AND SHALL NOT BE USED IN ANY WAY INUJURIOUS TO THE INTERESTS OF OR WITHOUT THE WRITTEN PERMISSION OF OLDCASTLE PRECAST, INC. COPYRIGHT © 2016 OLDCASTLE PRECAST, INC. ALL RIGHTS RESERVED.

94"X98"X42" OD SWITCHGEAR PAD
 SUBMITTAL LAYOUT
 DUKE POWER STANDARD

STRUCTURE QUANTITY

SECTION	WEIGHT (lbs)	Quantity(CY)
42" RISER	10,300	2.54

WEIGHT

CUSTOMER

DATE	SALES	DRAWN	ENGINEER	CHECKED	SALES ORDER
3/18/16	RS	LD			
	DRAWING NUMBER			REVISION	SHEET
	94X98-Switchgear Pad			REV DATE	1 OF 1