


NOTES:

1. FOR TYPICAL CURB INLET INSTALLTION AND PRECAST BASE INFORMATION NOT SHOWN SEE CURB INLET DRAWINGS.
2. MAXIMUM GUTTER SLOPE WITHOUT AND UP-STREAM GALLERY SHOULD NOT EXCEED 6% FOR FIBERGLASS GALLERY FORMS, SEE DRAWING 6Y-12Y, PAGE FIB-2.
3. OPTIONAL CAST IRON FRAME AND ACCESS COVER ARE AVAILABLE ON REQUEST.
4. CURVED PLATE NOSING ANGLE IS OPTIONAL ON 4AC MODEL ONLY.
5. CONTRACTOR TO SHIM BACK JOINT TO CREATE TOP SLOP.
6. OPTIONAL 4A SHORT & SKINNY TOP ALSO AVAILABLE.
7. SHIPPING WEIGHT FOR GUARD ROD:
 - 7.1. 2.5A MODEL = 5 LBS
 - 7.2. 4A & 4AC MODELS = 8 LBS

MODEL NUMBER	DIMENSIONS				WEIGHT LBS
	A	B	C	D	
2.5A	30	24	4	32	750
3AC	36	36	6	48	1,700
4A	48	24	5	32	1,200
4AC	48	36	5	47	1,500

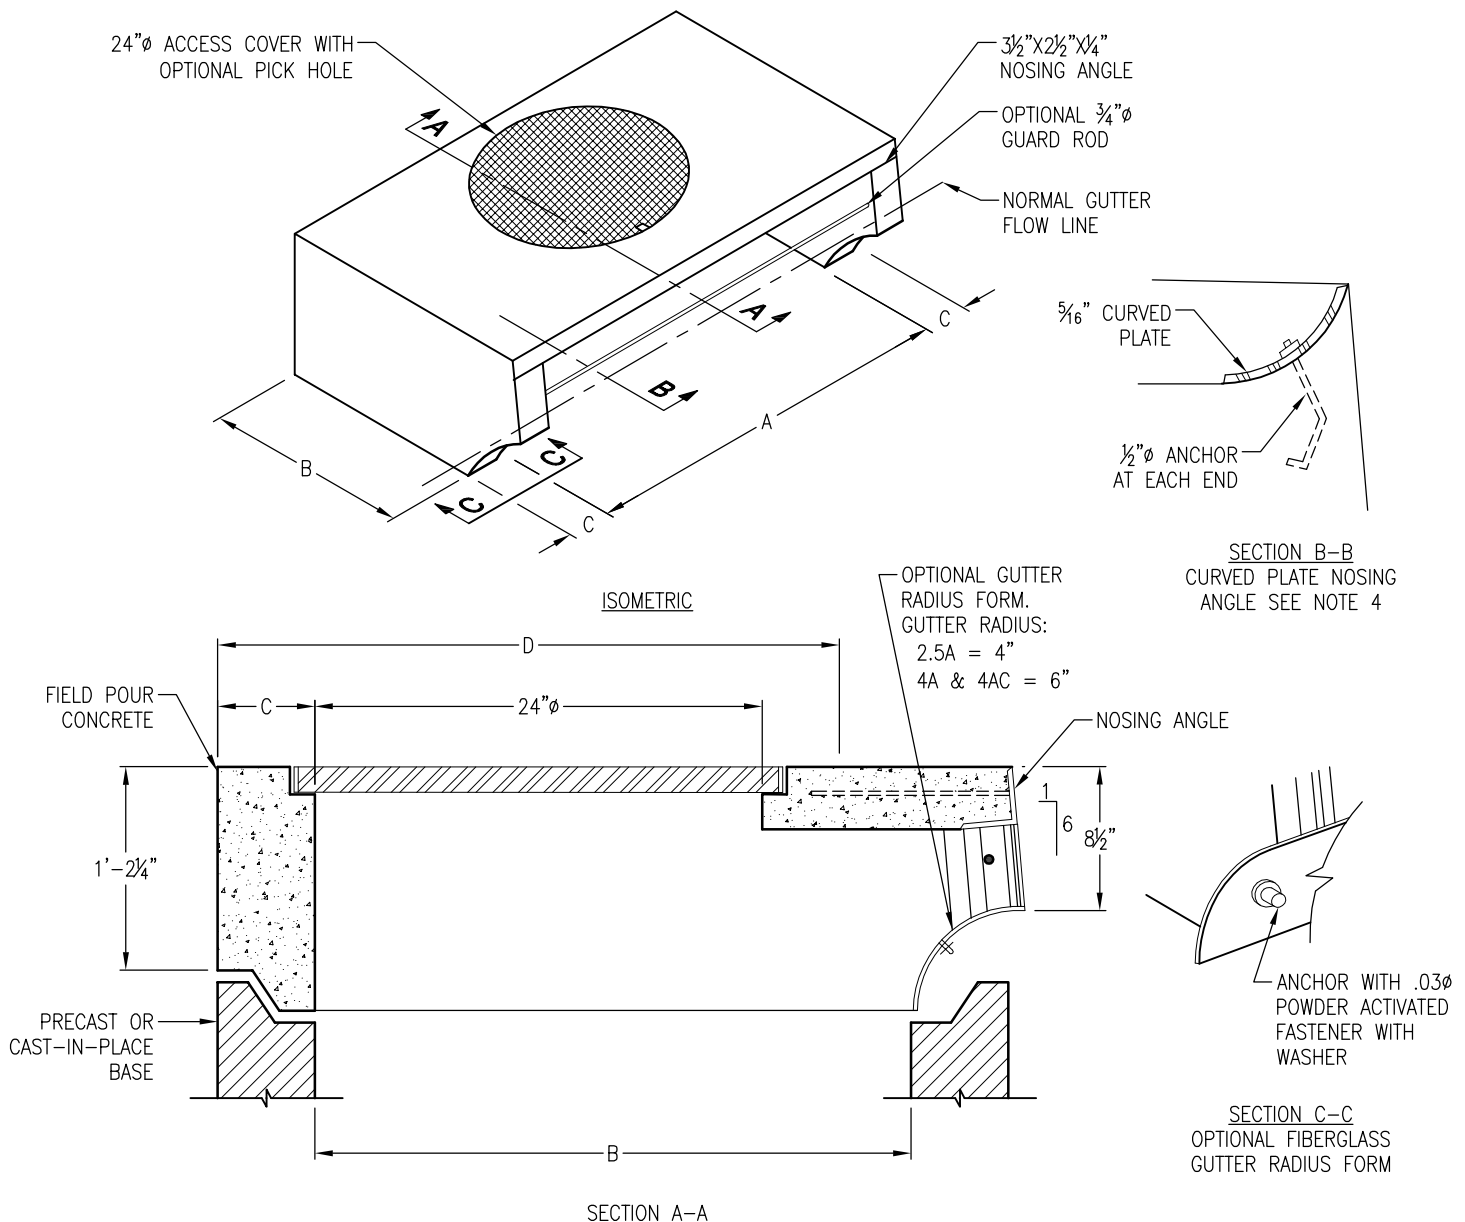

DRAWING MAY NOT CONFORM TO THE MOST CURRENT SPECIFICATION



Northern California
Madera ■ Morgan Hill ■ Pleasanton ■ Santa Rosa ■ Stockton ■ Tulare
Phone: 925-750-6650 Fax: 925-750-6660

2.5A, 3AC, 4A, 4AC

FILE NAME: CBT-1.DWG

REVISED: MARCH 2016

www.oldcastleprecast.com

2.5A, 3AC, 4A, 4AC
INLET TOPS
CURB INLET TOPS

Copyright © 2016 Oldcastle Precast, Inc.