

NOTES:



1. MAXIMUM HEIGHT IS 6'-0" PER CALTRANS STANDARD DRAWINGS, SEE D-73 NOTE ON TABLE.
2. STEPS SHALL BE INSTALLED ON ALL INLETS WHERE THE HEIGHT IS 30" OR MORE. (NOT SHOWN)
3. 24-13 (600-13) FRAME AND GRATE SHOWN IS SUPPLIED GALVANIZED, UNLESS SPECIFIED OTHERWISE. ALTERNATE CALTRANS GRATES ARE AVAILABLE ON REQUEST.

OTHER AVAILABLE GRATES:

- GRATE (24-10S) RETICULINE, WT=182 LBS
- GRATE (24-12X) WITH CROSS BARS, WT=192 LBS
- GRATE (24-12) WITH NO CROSS BARS, WT=326 LBS
- GRATE (24-9) WITH NO CROSS BARS, WT=263 LBS

SPECIFY GALVANIZED OR RAW METAL FINISH

GRATES WITHOUT CROSS BARS ARE IN AREAS WHERE THERE ARE NO BICYCLES OR PEDESTRIANS.

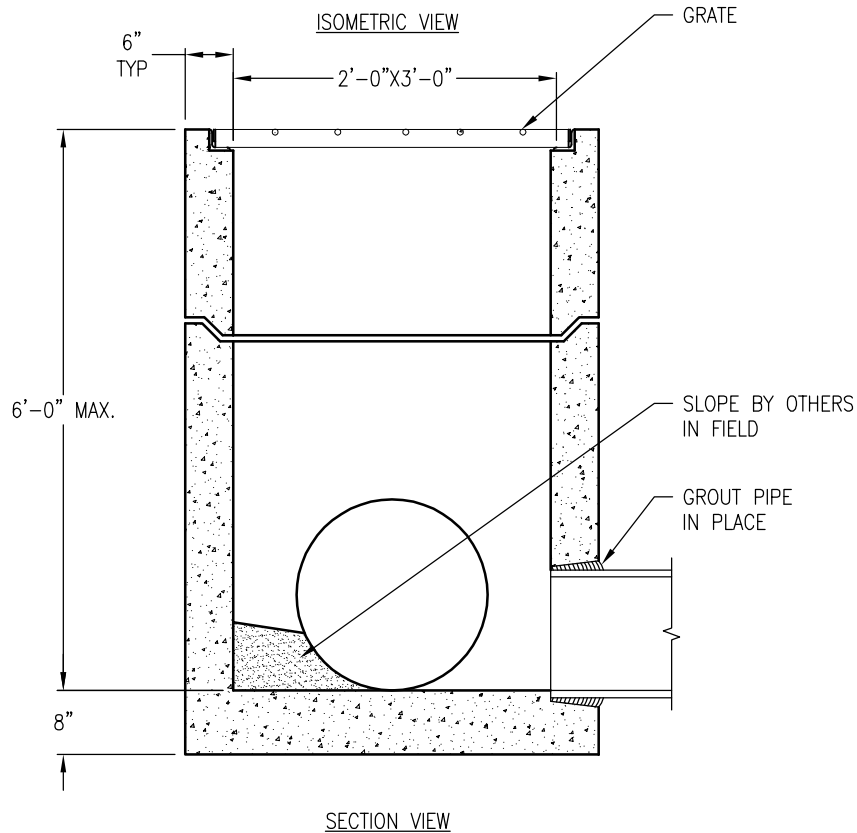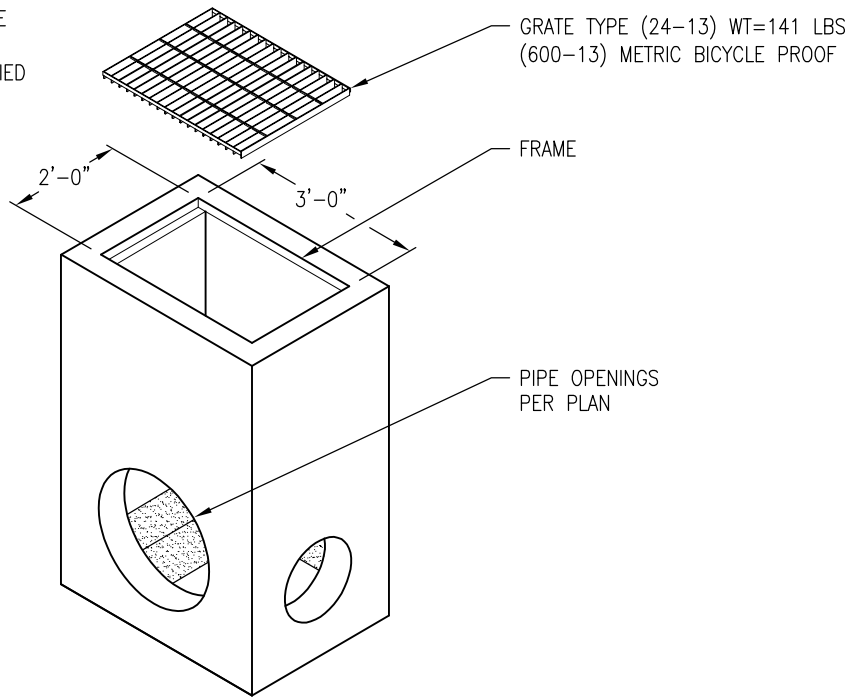

WEIGHT OF FLOOR SLAB IS 1,200 LBS
WEIGHT OF WALL IS 900 LBS/FT

DRAWING MAY NOT CONFORM TO THE
MOST CURRENT SPECIFICATION