

**Perk™ FILTER VAULT - 4 Foot**


BASE SECTION ASSEMBLED WITH CARTRIDGES / STACKS INSTALLED

4' X 7' ID w/ 3 Stacks	=	17,500 lbs / 8.75 Tons
4' X 9' ID w/ 5 Stacks	=	20,500 lbs / 10.25 Tons
4' X 11' ID w/ 7 Stacks	=	24,000 lbs / 12.00 Tons

**Perk™ FILTER VAULT - 6 Foot**

BASE SECTION ASSEMBLED WITH CARTRIDGES / STACKS INSTALLED

6' X 7' ID w/ 5 Stacks	=	22,000 lbs / 11.00Tons
6' X 9' ID w/ 9 Stacks	=	26,000 lbs / 13.00Tons
6' X 11' ID w/ 11 Stacks	=	30,000 lbs / 15.00Tons

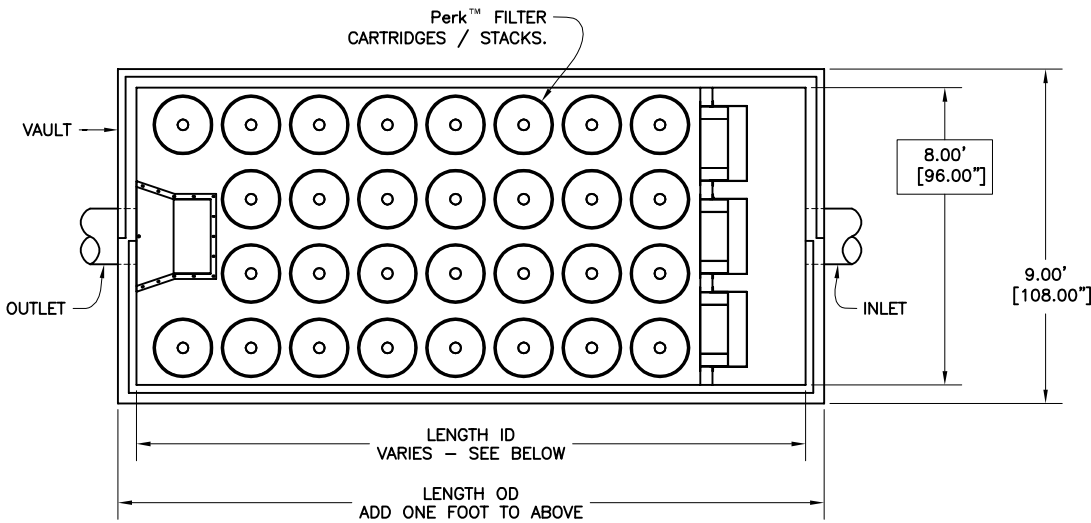

**Perk™ FILTER VAULT - 8 Foot**

BASE SECTION ASSEMBLED WITH CARTRIDGES / STACKS INSTALLED

8' X 9' w/ 11 Stacks	=	31,000 lbs / 15.50 Tons
8' X 11' w/ 15 Stacks	=	36,000 lbs / 18.00Tons
8' X 13' w/ 19 Stacks	=	40,500 lbs / 20.25Tons
8' X 15' w/ 23 Stacks	=	45,000 lbs / 22.50Tons
8' X 18' w/ 31 Stacks	=	51,500 lbs / 25.75Tons

**NOTES:**

1. "Maximum Pick Weights" are based on the largest size component / subassembly of a given system type with 12" + 18" Cartridge Stacks.
2. Actual sizes may vary and actual weights are usually lower than stated on this drawing.
3. Closest approximate max pick weights will be calculated and shown on Site /Job specific drawings as required.

TITLE

**Perk™ Filter Vault**  
**Maximum Pick Weights**



**Oldcastle Precast®**

360 Sutton Place, Santa Rosa, CA 95407  
Ph: 800.579.8819, Fax: 707.524.8186, www.oldcastle.com