


MODEL	INLET ID (Ø Inches)	BODY OD (Inches)	Solids Storage Capacity (Cu. Ft.)	Filtered Flow (GPM)	Bypass Capacity (GPM)
FG-DS8A	8	22 x 33 x 17.5	1.70	185	915
FG-DS10A	10	22 x 33 x 17.5	1.70	325	1650



NOTES:

1. FloGard® Downspout Filter is available to fit most industry standard downspouts (See Tabulation).
2. Filter Inserts shall have adequate bypass capacity to allow downspout to flow unimpeded at all times.
3. Filter assembly shall be constructed from stainless steel (type 304).
4. Filter medium shall be installed & maintained in accordance with manufacturer recommendations.

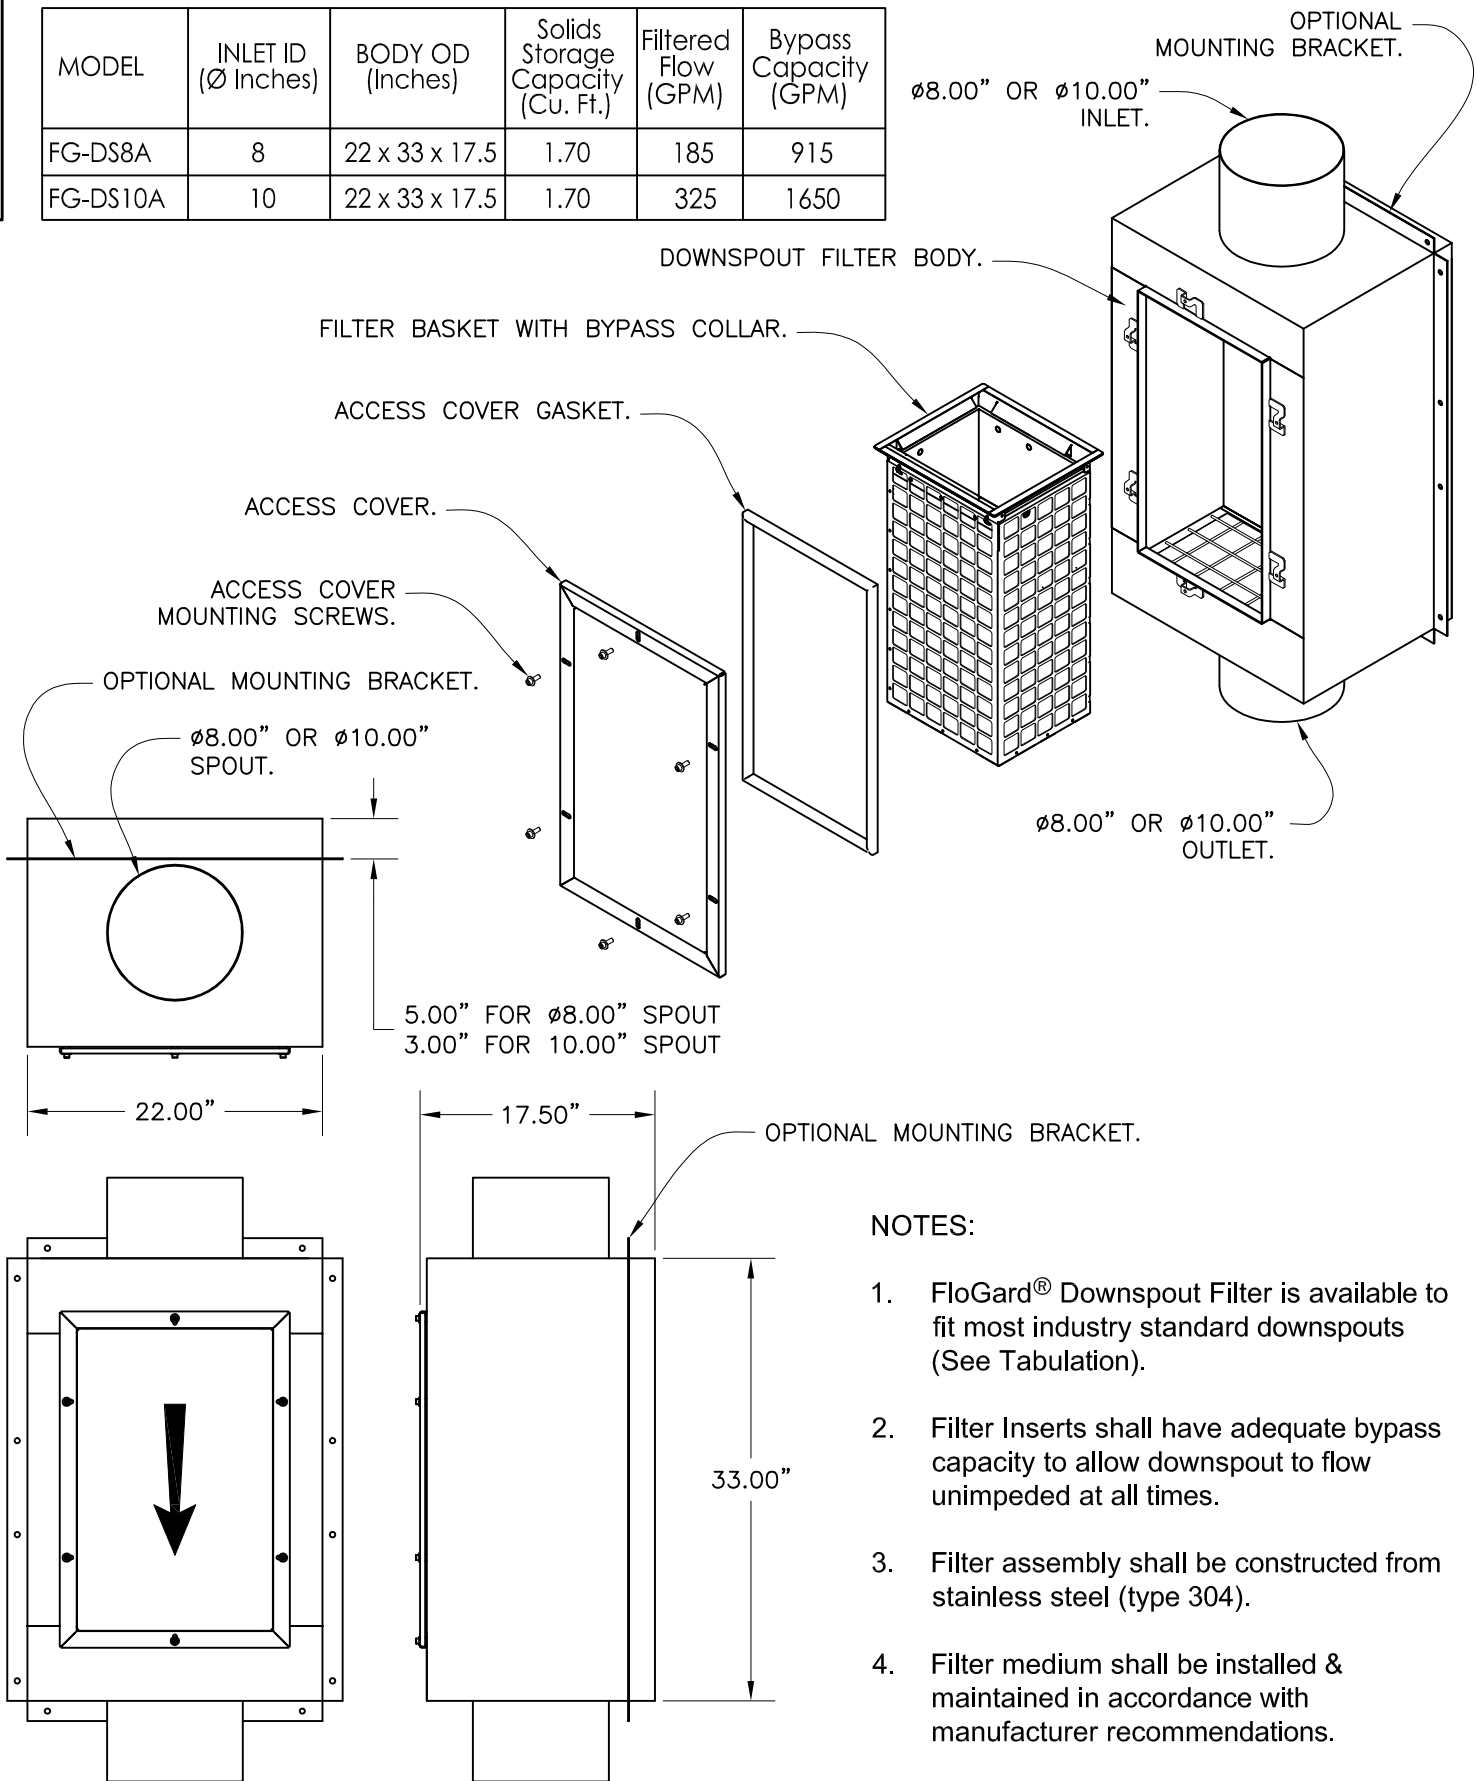

Inlet Filtration

FloGard®
Downspout Filter
Ø8.00" & Ø10.00" Sizes



Oldcastle®
Stormwater Solutions

7921 Southpark Plaza, Suite 200 | Littleton, CO | 80120 | Ph: 800.579.8819 | oldcastlestormwater.com

THIS DOCUMENT IS THE PROPERTY OF OLDCASTLE PRECAST, INC. IT IS SUBMITTED FOR REFERENCE PURPOSES ONLY AND SHALL NOT BE USED IN ANY WAY INJURIOUS TO THE INTERESTS OF SAID COMPANY. COPYRIGHT © 2010 OLDCASTLE PRECAST, INC. ALL RIGHTS RESERVED.

DRAWING NO. DSF-0002	REV A	ECO ECO-0142 NEW 7/13/16	DATE JPR 1/14/15	SHEET 1 OF 1
-------------------------	----------	--------------------------------	---------------------	--------------