48X78XVARIES
PULL BOX

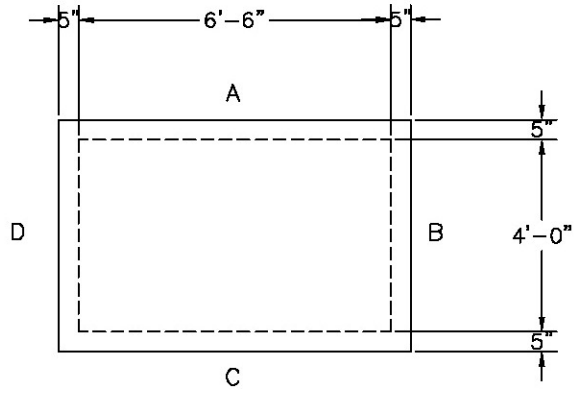


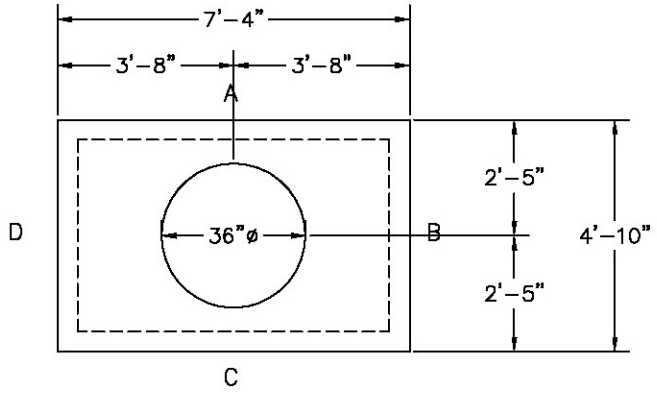


NOTES:
1. CONCRETE: 28 DAY COMPRESSIVE STRENGTH f'c=4,000 psi.

2. PRECAST STRUCTURES ARE PRODUCED TO MEET OR EXCEED ASTM SPECIFICATIONS

3. CONTACTOR TO VERIFY SIZE AND LOCATION OF ALL OPENINGS

4. ALL DISPLACED REBAR IS TO BE REPLACED – 1/2" EACH SIDE OF OPENING

KNOCK–OUTS, BLOCK–OUTS, TERMINATORS, AND CUSTOM LETTERING ON COVERS ARE AVAILABLE UPON REQUEST. CONTRACTOR MUST SPECIFY

PROPERTY OF OLDCASTLE PRECAST, NOT TO BE REPRODUCED WITHOUT WRITTEN CONSENT.2005 ©

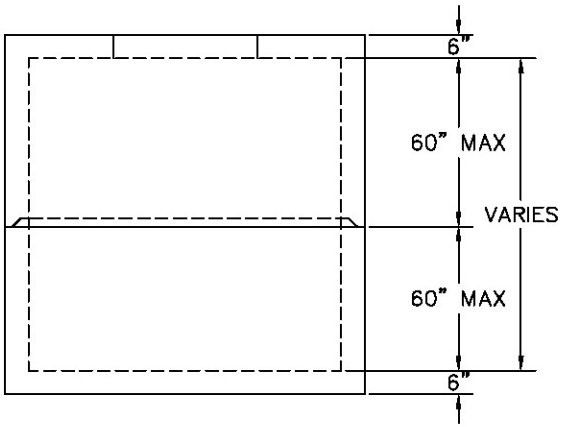


C
FRONT VIEW

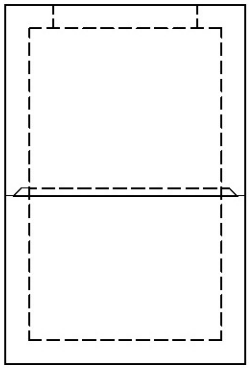

B
SIDE VIEW

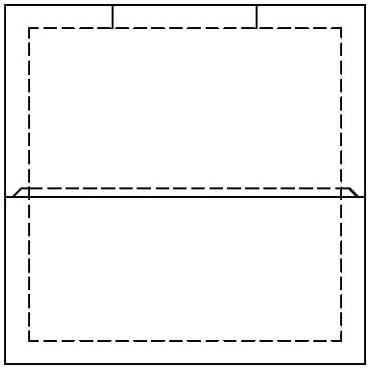

A
BACK VIEW

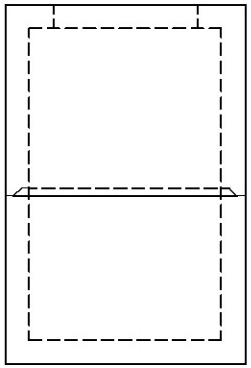

D
SIDE VIEW

| WALLS | | | | | PRODUCTION YARDAGE | WEIGHTS | REINFORCEMENT |
|---|---|---|---|---|---|---|---|
| | | | | | BASE: | | |
| | | | | | WALL: | | |
| | | | | | TOP: | | |
| | | | | | WALL: | | |
| | | | | | LID: | | |
| | | | | | CASTING: | | |
| REMARKS: | | | | | HATCH: | | |
| | | | | | STEEL WT.: | CONC WT.: | |

STRUCTURE TYPE "48"x78"xVARIES" MANHOLE"

Oldcastle™ Precast Inc.
690 WEST TAFT–VINELAND RD. ORLANDO FL 32824
(407) 855–7580 • FAX: (407) 855–2424

CONTRACTOR

PROJECT

| | | | |
|---|---|---|---|
| DRAWN: SJW | | DATE: 11/6/07 | |
| CHECKED: | | DATE: | |
| PRODUCED: | | SHIPPED: | |
| STR. NO.: XX | S.O. NO.: 00000 | | LN. NO.: |
| DRAWING NO.: | | | LOC.: |
| SCALE: 1"=48" | SHEET: 1 OF 1 | | |