


PLAN VIEW

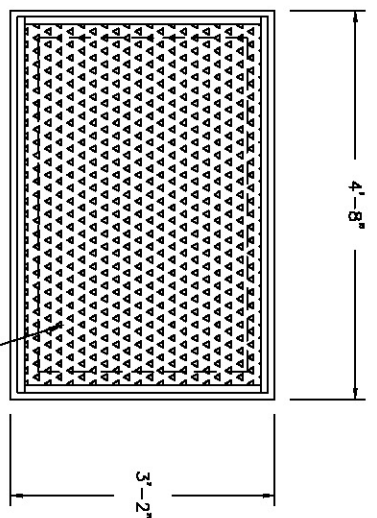


FRAME AND COVER DETAIL


- NOTES:
1. CONCRETE: 28 DAY COMPRESSIVE STRENGTH $f_c=4,000$ psi.
 2. PRECAST STRUCTURE ARE PRODUCED TO MEET OR EXCEED ASTM SPECIFICATIONS
 3. SUPPORTS H20 LOADING AS INDICATED BY AASHTO
 4. CONTRACTOR TO VERIFY SIZE AND LOCATION OF ALL OPENINGS

30X48 FRAME AND COVER GALVANIZED - LETTERING "SPECIFY"


KNOCK-OUTS, BLOCK-OUTS, TERMINATORS, AND CUSTOM LETTERING ON COVERS ARE AVAILABLE UPON REQUEST. CONTRACTOR MUST SPECIFY

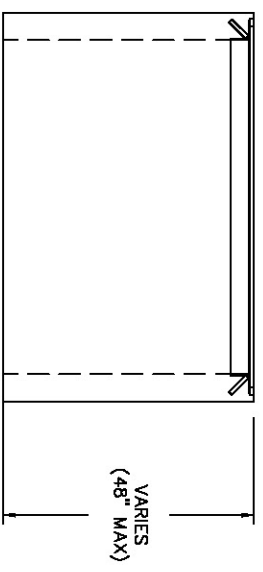


FRONT VIEW

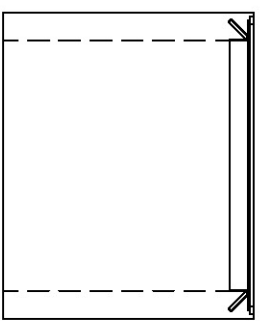

RIGHT VIEW

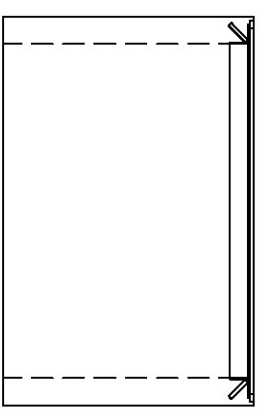

REAR VIEW



RIGHT VIEW

STRUCTURE TYPE "30"x48"xVARIES" VAULT"



Oldcastle™ Precast Inc.

890 WEST TAFT VINELAND RD. ORLANDO FL 32824
(407) 856-7580 • FAX: (407) 856-2424

CONTRACTOR PROJECT

DRAWN: S/JW	DATE: 3/29/08
CHECKED:	DATE:
PRODUCED:	SHIPPED:
STR. NO.: XX	S.O. NO.:
DRAWING NO.:	LN. NO.:
SCALE: 1:24	LOC.:

SHEET: 1 OF 1

WALLS	BASE:	PRODUCTION YARDAGE	WEIGHTS	REINFORCEMENT
	WALL:			
	TOP:			
	WALL:			
	LID:			
	CASTING:			
	HATCH:			
	STEEL WT.:			
				30X48 GALVANIZED FBC
				CONC WT.:

REMARKS: