




3' TOP SLAB

"H"	Wt.
5" -	464#

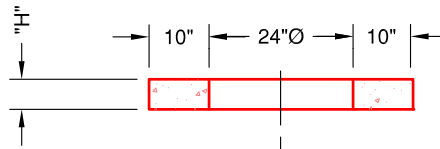


3' DIA. BARREL

"H"	Wt.
16" -	717#
32" -	1429#
48" -	2141#

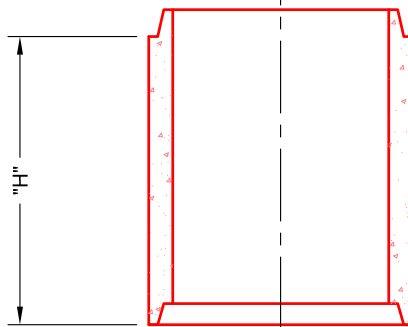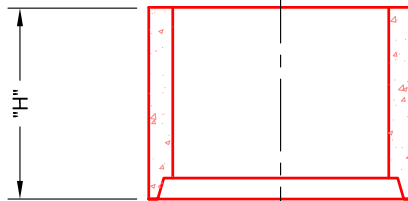

3' DIA. BASE

"H"	Wt.
32" -	1841#
48" -	2583#

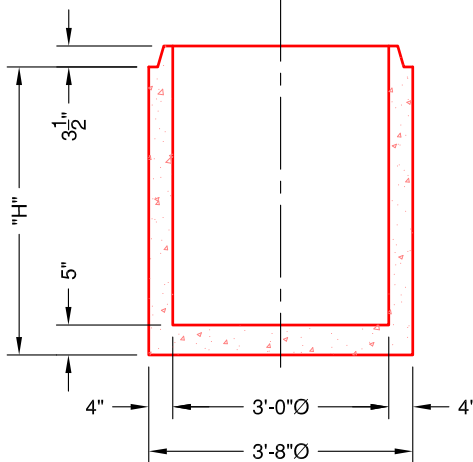

SECTIONAL VIEW

SPECIFICATIONS:

1. Concrete minimum compression strength:
F'c=5,000 PSI @ 28 days.
2. Reinforcing steel: ASTM A615, Fy=60,000 PSI

ITEMS ARE SUBJECT TO CHANGE WITHOUT NOTICE.