


4'-0" x 6'-0" x Varies I.D. Utility Vault Model: V 46

## **Utility Vault**

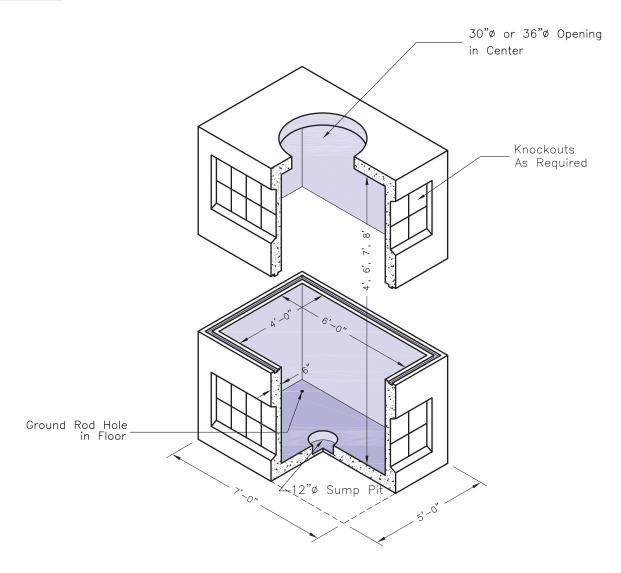

## **GENERAL NOTES:**

- 1. Concrete: 28 Day Compressive Strength f'c = 5,000 psi
- 2. Steel Reinforcement: ASTM A-615 Grade 60
- 3. Cover to Steel 1" Minimum
- 4. Vaults are Designed to Meet ASTM C858 and ACI 318 with AASHTO HS-20 Loading
- 5. Earth Cover 0 to 1 Feet
- 6. Construction Joint Sealed with 1" Dia. Butyl Rubber or Equivalent
- 7. Wall thickness Available in 6," 8", 10", or 12"
- 8. Stock Structure has Inserts Cast into the Inside Surfaces in a Stock Pattern. Pattern Available Upon Request.