



"A"	"B"	"C"	"D"	"E"
12"	16"	13"	16-5/8"	26"
16"	18"	16-7/8"	20-3/4"	30"
16"	24"	17-1/4"	20-3/4"	30"
24"	18"	24-7/8"	28-3/4"	38"
24"	24"	25-1/4"	28-3/4"	38"
26"	18"	26-7/8"	30-3/4"	40"
26"	24"	27-1/4"	30-3/4"	40"

"D" = GRATE WIDTH

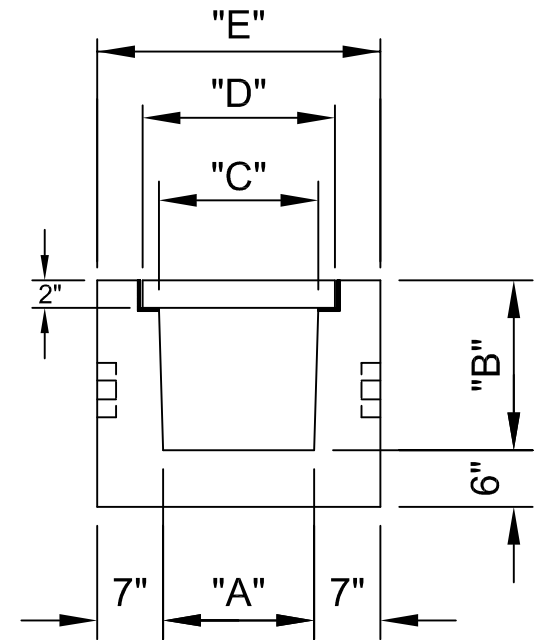


END VIEW

NOTE:
END CAPS ARE SOLD SEPARATELY.

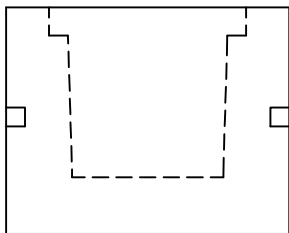


END CAP
SOLID

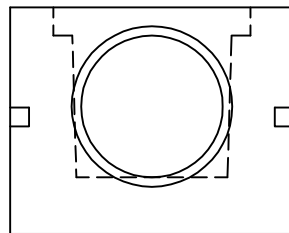

END CAP
WITH KNOCKOUT

CONNECTING ROD
POCKETS
(TYP)

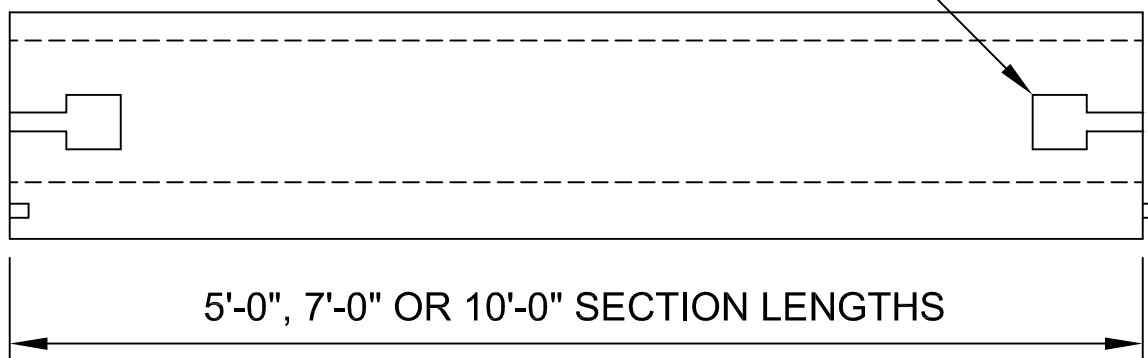

SECTION VIEW

- CONCRETE STRENGTH: 4000 PSI MIN. @ 28 DAYS
- REINFORCING CONFORMS TO ASTM A615 & A185
- DESIGN: HS-25 TRAFFIC LOADING
- GRATE DESIGN: HS-25 TRAFFIC LOADING, BICYCLE SAFE