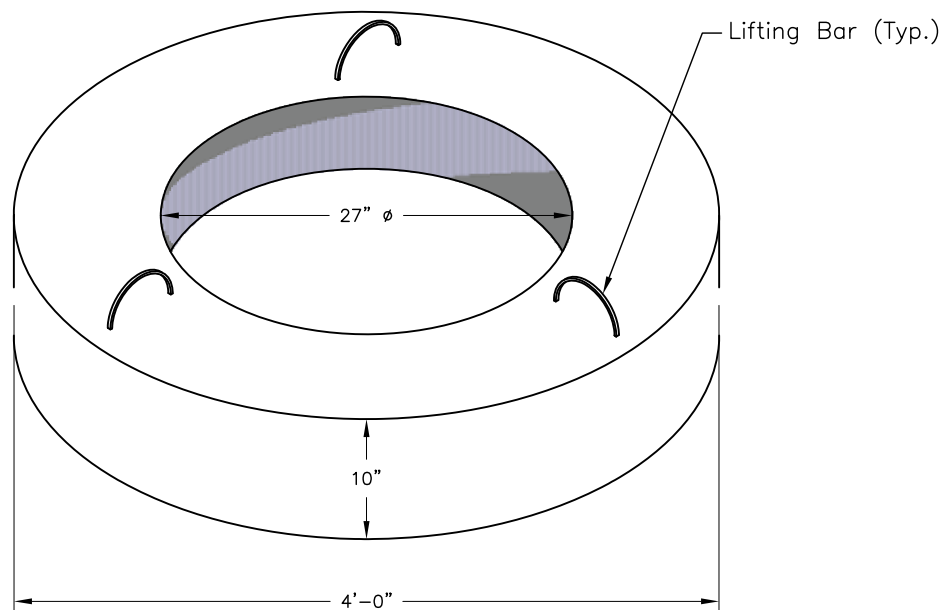


Top Slab**SPECIFICATIONS:**

1. Concrete: 28 Day Compressive Strength $f'_c = 4000$ PSI.
2. Steel reinforcement: ASTM A-615, Grade 60, ASTM A-185.
3. Designed for AASHTO HS-20 loading with 18" cover.