




MH4X4X4

FILE NAME: 322UTTMH4X4X4_ISO.DWG

ISSUE DATE: January, 2008 www.oldcastleprecast.com


4'-0" x 4'-0" x 4'-0" I.D. Communication Vault


Copyright © 2008 Oldcastle Precast*

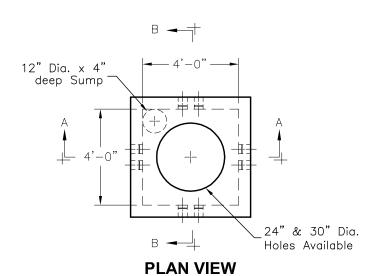

GENERAL NOTES:

- 1. Concrete: 28 Day Compressive Strength f'e = 5,000 psi
- 2. Steel Reinforcement: ASTM A-615, Grade 60
- 3. Cover to Steel-1" Minimum
- 4. Vaults are Designed to Meet ASTM C857 and ACI 318 with AASHTO HS-20 Loading
- Construction Joint Sealed with
 Dia. Butyl Rubber or Equivalent
- 5. Approx. wt. for slab .90 tons and 3.7 tons for base section.
- 6. Typical termaduct spacing 8" O.C. or as shown.

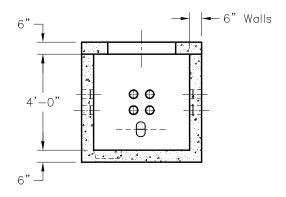

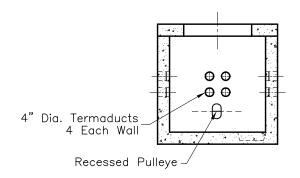

SECTION A-A

NOTE: Opposite Wall is Similar

SECTION B-B

NOTE: Opposite Wall is Similar



MH4X4X4

FILE NAME: 322UTTMH4X4X4_DET.DWG

ISSUE DATE: January, 2008

www.oldcastleprecast.com

4'-0" x 4'-0" x 4'-0" I.D. Communication Vault

Copyright © 2008 Oldcastle Precast