

**LIFTING INSERT**  
(4) Required

**OPENING**  
25" X 15"

**OPENING**  
12" Sq.

6'-11"

6'-10"

10"

**Oil Containment Curb Available**



**TPAD 828310**

FILE NAME: 325UETP82\_ISO.DWG

ISSUE DATE: January, 2008


[www.oldcastleprecast.com](http://www.oldcastleprecast.com)

**82" x 83" x 10"**  
**Transformer Pad**  
**NGRID**  
**5,800 Lbs**

Copyright © 2008 **Oldcastle Precast**

GENERAL NOTES:

1. Concrete: 28 Day Compressive Strength  $f'_c = 5,000$  psi.
2. Rebar: Grade 60 Per ASTM A615.
3. Design Loading: AASHTO HS20-44.
4. General Contractor to Verify all Openings Sizes and Locations.
5. All Openings have Additional Rebar reinforcement.

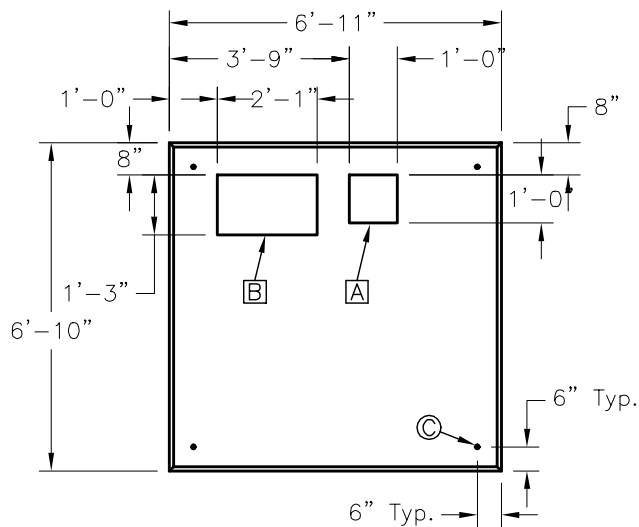

**PLAN VIEW**

DATA CHART

LTR	QTY	Description
A	1	12" x 12" Opening
B	1	25" x 15" Opening
C	4	5" Utility Anchor



**SIDE ELEVATION**



**END ELEVATION**



**TPAD 828310**

FILE NAME: 325UETP82\_DET.DWG

ISSUE DATE: January, 2008

[www.oldcastleprecast.com](http://www.oldcastleprecast.com)

**82" x 83" x 10"**  
**Transformer Pad**  
**NGRID**  
**5,800 Lbs**

Copyright © 2008 **Oldcastle Precast**