

NOTES:

- 1. VAULTS CAN BE DESIGNED TO MEET ASTM C858 AND AASHTO LOADINGS.
- $2. \ \mathsf{OPENINGS} \ \mathsf{MAY} \ \mathsf{BE} \ \mathsf{SIZED} \ \mathsf{AND} \ \mathsf{LOCATED} \ \mathsf{AS} \ \mathsf{SPECIFIED} \ \mathsf{WITHIN} \ \mathsf{STRUCTURAL} \ \mathsf{LIMITATIONS}.$
- 3. OPTIONAL ACCESSORIES MAY BE INSTALLED AS SPECIFIED.
- 4. FOR OPTIONAL ACCESSORIES, SEE ACCESSORIES / HARDWARE SECTION.
- 5. IT IS RECOMMENDED THAT BITUMINOUS MASTIC BE USED AT ALL JOINTS.
- 6. METRIC EQUIVALENTS (SHOWN IN PARENTHESIS) ARE ROUNDED TO NEAREST 5mm OR 5kg.



2240 S. Yellowstone Hwy, Idaho Falls, Idaho 83402 Phone: 208-522-6150 Fax: 208-522-9701

VAULTS


FILE NAME: 230TBUV016


ISSUE DATE: 1/2011


www.oldcastleprecast.com

Utility Vault 8' X 12' X 8' ISO View

Copyright © 2011

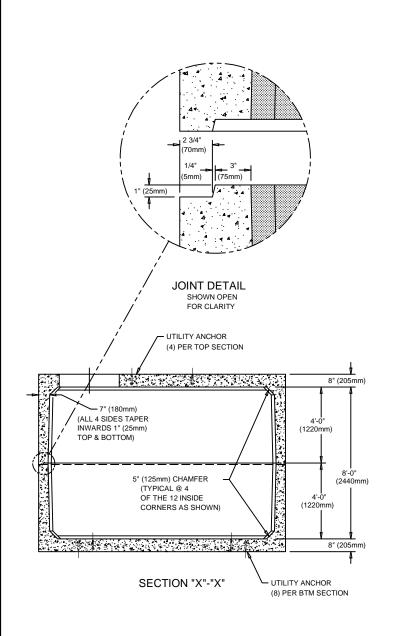

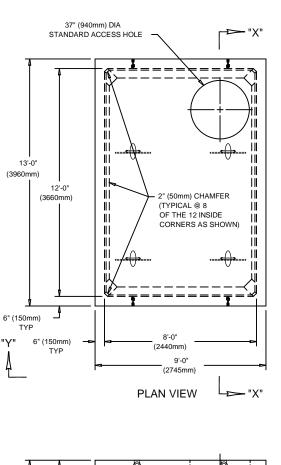

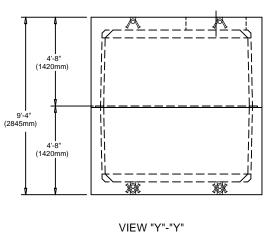



2240 S. Yellowstone Hwy, Idaho Falls, Idaho 83402 Phone: 208-522-6150 Fax: 208-522-9701

VAULTS

FILE NAME: 230TBUV016

ISSUE DATE: 1/2011

www.oldcastleprecast.com

Utility Vault 8' X 12' X 8'

Copyright © 2011