
ALL CONCRETE SHALL HAVE A 28 DAY COMPRESSIVE STRENGTH OF 4500 psi.

REINFORCING STEEL SHALL COMPLY WITH
ASTM A615 GRADE 60, A706 GRADE 60 OR A497 GRADE 70.
BAR BENDING AND PLACEMENT SHALL COMPLY WITH
THE LATEST ACI STANDARDS

STANDARD STRUCTURAL DESIGN IS BASED ON AASHTO HS 20 WHEEL LOADING

WATER TABLE IS AT 3'-O" BELOW GRADE FOR STANDARD STRUCTURAL DESIGN

THE STANDARD DESIGN IS BASED ON THE TOP AT FINISHED GRADE ELEVATION.

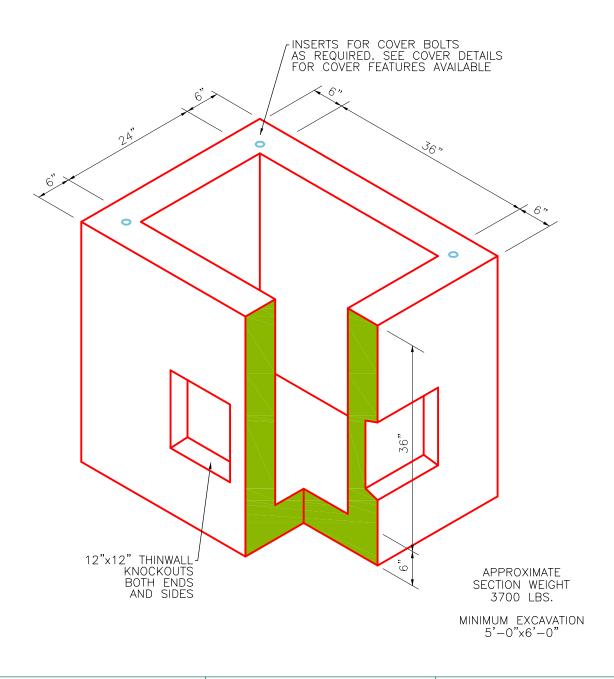



1900 Rilling Road San Antonio, TX 78214 Phone: (210) 923-4523 Fax: (210) 921-0473

23-H36-6BKO

FILE NAME: 236H36BK.dwg ISSUE DATE: March, 2005

www.oldcastlesanantonio.com

24"x36"x36" HANDHOLE WITH MONOLITHIC BOTTOM SLAB AND THINWALL KNOCKOUTS

Copyright 2005 Ottomatie Pressi All Rights Reserved