


Optional HS-20 Rated Gate Styles.


1. Standard Galvanized
2. ADA Galvanized
3. Cast Iron

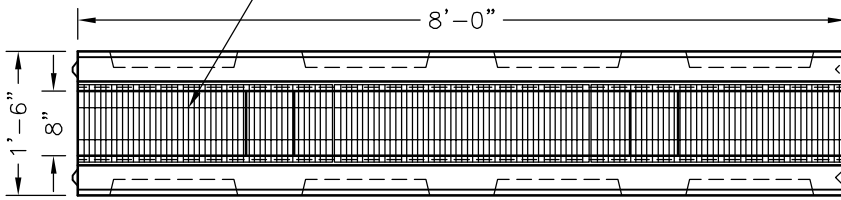


PLAN VIEW

GENERAL NOTES:


1. Concrete: 28 Day Compressive Strength $f'_c = 5,000$ psi.
2. Reinforcing Steel, ASTM A-615 Grade 60
3. Design Live Load = HS-20
4. Earth Cover = 0'-0" Min. to 0'-0" Max.
5. Invert of Structure must be level, Grout Slope as Needed (Refer to Example Trench Layouts).

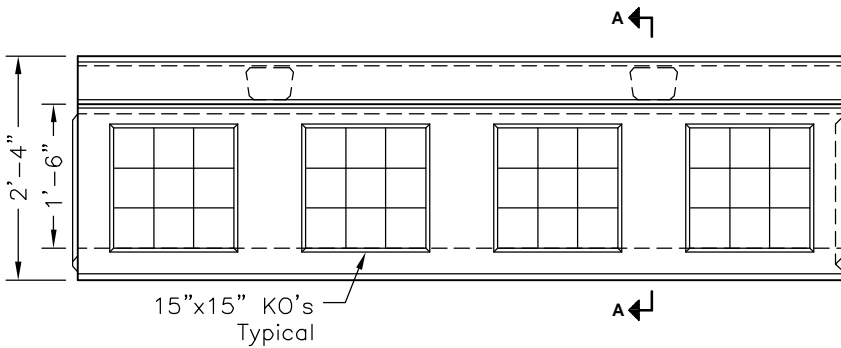

ELEVATION VIEW

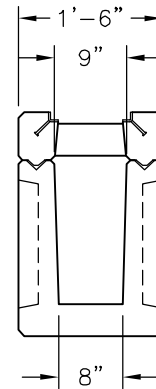


SECTION A-A

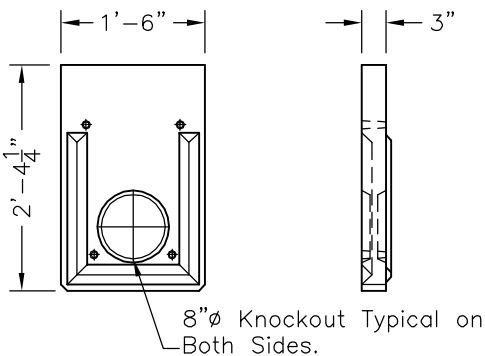

BOLT ON END CAP DETAIL

(Attachable To Both Ends As Needed.)

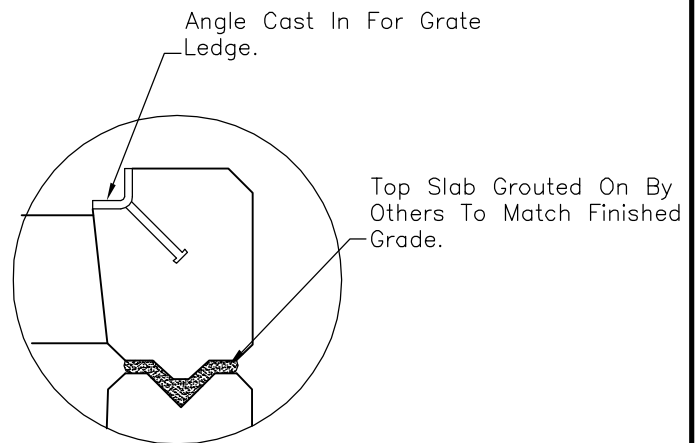

DETAIL A

SCALE: 1/2" = 1'-0"



5115 Massaponax Church Road. Fredericksburg, Virginia
Phone: 540.898.6300 Fax: 540.898.2389

TD-8

FILE NAME: 365DISTD8.DWG

ISSUE DATE: March, 2003

**0'-8"x1'-6"x8'-0" I.D.
Trench Drain**

Copyright © 2003 Oldcastle Precast Inc.