

**SIZE & MATERIAL**

6" Deep, Stackable Sections  
Variable Length  
Variable Width  
Glass Reinforced Polyester

**COMPONENTS**

- Sidewall
- Corner
- Joining Peg

**WEIGHT**


All individual components  
are less than 55 lbs



Sidewall




Corner



Joining Peg



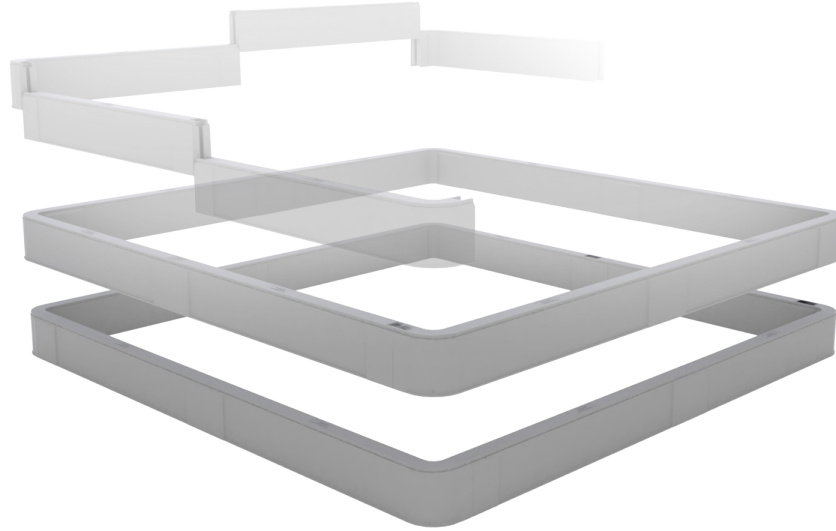

**OPTIONS**

- Base
- Steps or ladders
- Duct entry
- MULTIduct spigots

**RAW MATERIAL SPECIFICATION**

**Material Properties**

Material Profile	Glass Reinforced Polyester (GRP)	Grey
Tensile Strength	ISO 527-4	62 MPa
Flexural Strength	ISO 14125	142 MPa
Flexural Modulus	ISO 14125	9,6 GPa
Impact Strength	ISO 179	64 J/mm <sup>2</sup>
Heat Distortion Temperature Range	ISO 75-2	> 200 °C
Density	ISO 1183	1.7 g/cm <sup>3</sup>
Water Absorption	ISO 62	≤0.5%
Volume Resistivity	IEC 60093	1.00E15
Fire Performance	UL94	HB to V0
Limited Oxygen Index	ISO 4589-2	27%