

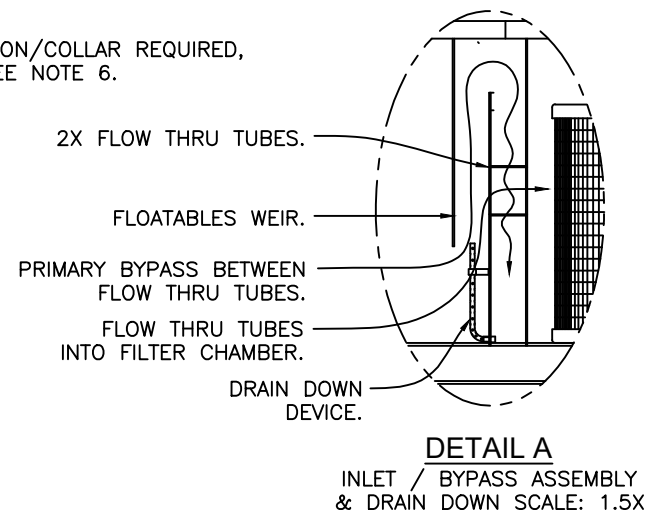
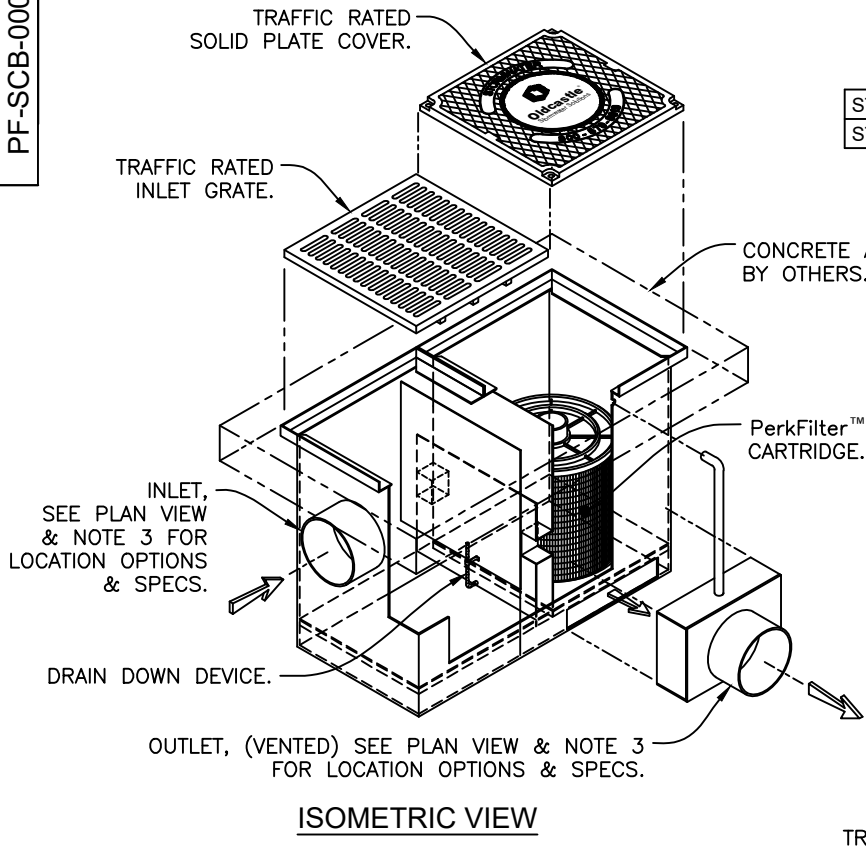


CARTRIDGE SIZE	TREATMENT FLOW RATE GPM / CFS	TOTAL FLOW CAPACITY CFS	MINIMUM DEPTH (FEET)
12.00"	12 / 0.03	1.3	2.00
18.00"	18 / 0.04	1.3	2.50
STACKED 12.00" + 12.00"	24 / 0.05	1.3	3.16
STACKED 18.00" + 12.00"	30 / 0.07	1.3	3.67

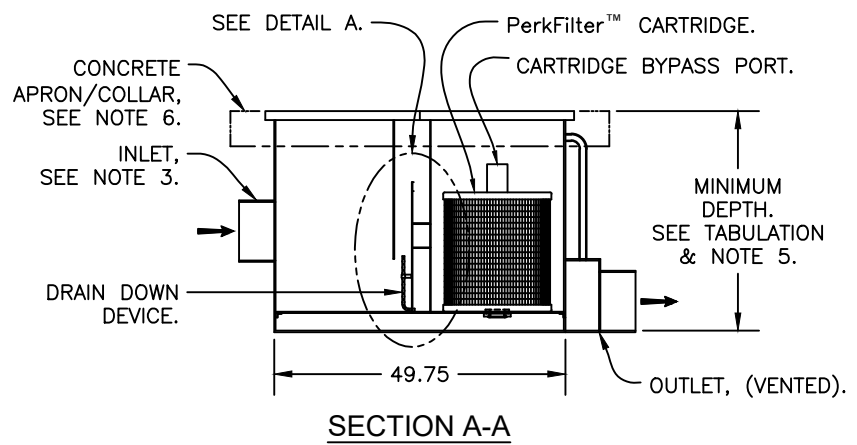

- Notes:
- All steel utilized in fabrication and shall be 1/4" plate per ASTM A36.
  - PerkFilter™ Catch basin shall be supplied with traffic rated (H20) bicycle-proof grates and solid plate cover.
  - Inlet pipe(s) may enter device on any of three sides of the inlet chamber. Outlet pipe may exit on any of all four sides. All pipe is Ø 12" maximum.
  - Inlet chamber shall be supplied with a DRAIN DOWN device designed to remove standing water between storm events.
  - For depths less than the specified minimum contact Oldcastle Infrastructure® for engineering assistance.
  - Field poured Concrete Apron / Collar required, by others. Refer to PF-SCB-1000 for recommended configuration.
  - PerkFilter™ cartridge shall be maintained in accordance with manufacturer recommendations.

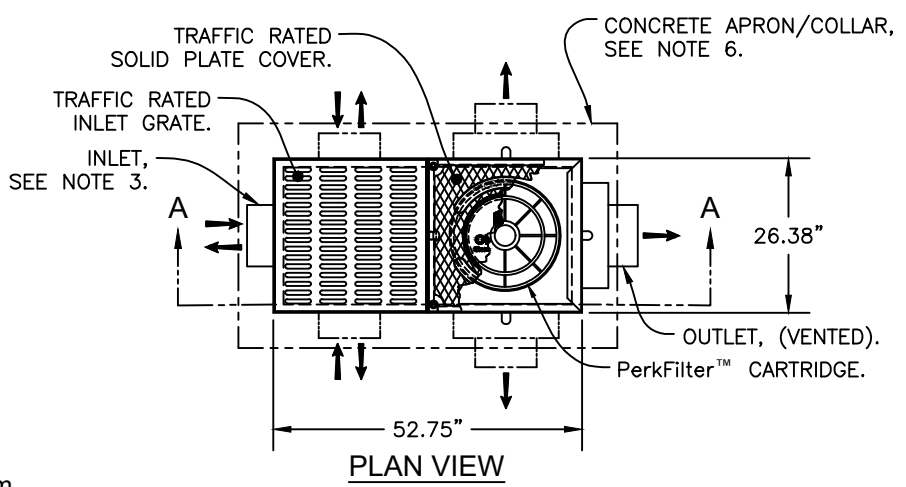

**PerkFilter™**  
Steel Catch Basin  
Single Cartridge

