


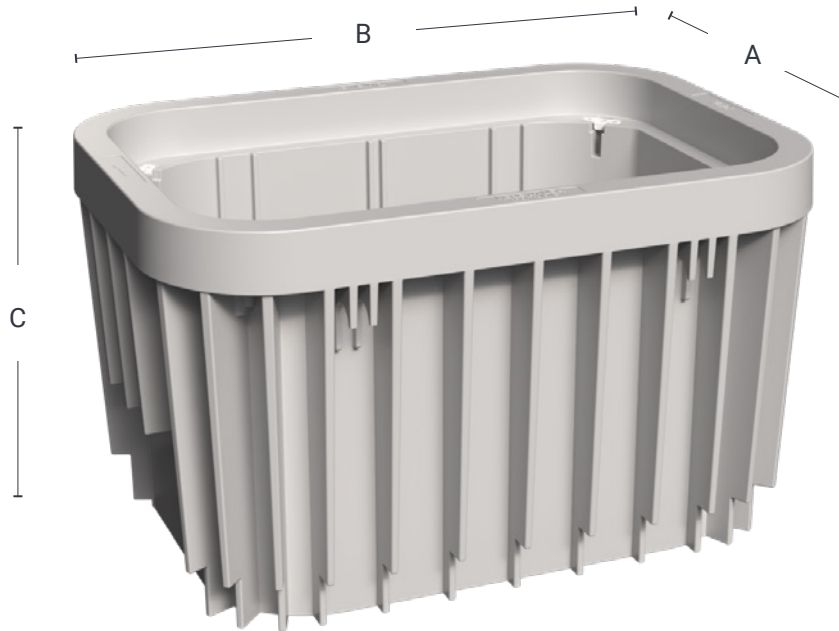

Material & Style

Composite

Straight Wall

2436-18 Body

ANSI/SCTE-77, Tier 15
68 lbs

ANSI/SCTE-77, Tier 22
68 lbs

2436-24 Body

ANSI/SCTE-77, Tier 15
82 lbs

ANSI/SCTE-77, Tier 22
82 lbs

2436-36 Body

ANSI/SCTE-77, Tier 15
115 lbs

ANSI/SCTE-77, Tier 22
115 lbs

	A	B	C
2436-18	28 5/16"	39 15/16"	18"
2436-24	28 5/16"	39 15/16"	24"
2436-36	28 5/16"	39 15/16"	36"

Cover comes standard with permanent markings for manufacturer, load rating, model size and manufacturing location. Based upon lid and body combination, this unit can be Tier 15 or Tier 22. T22 rating when paired with T22 polymer concrete lid.

Revision 04/2025




Medium Duty
ANSI/SCTE TIER 15



Heavy Duty
ANSI/SCTE TIER 22

For use in non-vehicular traffic situations only. Weights and dimensions may vary slightly. Actual load rating is determined by the box and cover combination.



Workable area for
conduit or mouseholes

Options


Bodies:

- 4" Conduit Holes OR 4x4 Mouseholes
- 2.5" Drop Holes on Long Sidewall
- Pulling Eyes
- Tier-rated stacking design, without additional hardware
- Cable Racking
- Dividers



Available Covers:

- Duralite®, Flush Solid
- Duralite®, T-Cover Solid
- Polymer Concrete, Flush Solid



Fasteners:

- Hex Head - Standard or Coil Thread Bolt
- Penta Head - Standard or Coil Thread Bolt
- Detail: Bolt Down



Add On Options:

- Logos and Special Markings
- Marking Plate
- EMS Marker

Product modifications, including but not limited to, cutting for conduit access, or "mouseholes" may alter ratings and product performance listed within this document unless stated otherwise.

All information contained on this sheet is current at the time of publication.

Oldcastle Infrastructure reserves the right to discontinue or update product information without notice.

© 2025 Oldcastle Infrastructure, Inc.